


Part No.	Conductor Size mm <sup>2</sup>	Stud mm	Length L	Width W	Inside Dia D	Hole Dia d $\phi$
T400-12	400	12	103.0	47.3	27.0	12.7
T400-14	400	14	103.0	47.3	27.0	14.7
T400-16	400	16	103.0	47.3	27.0	16.4
T400-20	400	20	103.0	47.3	27.0	20.9
T400-BL	400	-	103.0	47.3	27.0	-
T500-14	500	14	105.0	53.0	30.0	14.7
T500-16	500	16	105.0	53.0	30.0	16.4
T500-20	500	20	105.0	53.0	30.0	20.9
T500-BL	500	-	105.0	53.0	30.0	-
T630-16	630	16	125.0	63.0	33.8	16.4
T630-20	630	20	125.0	63.0	33.8	20.9
T630-BL	630	-	125.0	63.0	33.8	-
T800-20	800	20	169.0	70.0	38.0	20.9
T800-BL	800	-	169.0	70.0	38.0	-
T1000-20	1000	20	170.0	77.0	42.5	20.9
T1000-BL	1000	-	170.0	77.0	42.5	-

## Copper Tube Butt Splices – 1B 99.9% PURE COPPER

Our range of copper tube splices are designed for jointing low voltage conductors from 1.5mm<sup>2</sup> to 1000mm<sup>2</sup>. They feature an internal taper at both ends to ease the insertion of the conductor and a central stop to ensure correct positioning.

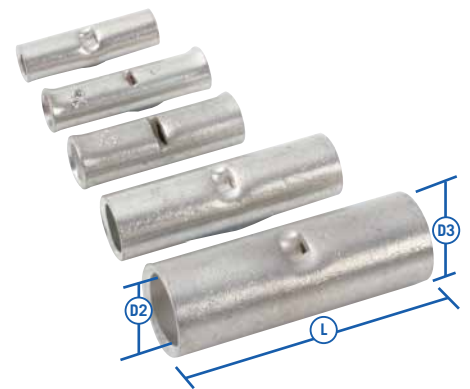

Part No.	Cable Size mm <sup>2</sup>	L mm	D2 mm	D3 mm	Pack Qty
BS1.5	1.5	14.0	1.8	3.3	100
BS2.5	2.5	16.0	2.3	4.2	100
BS4	4	19.0	3.0	5.0	100
BS6	6	22.0	4.0	6.0	100
BS10	10	25.0	4.7	6.6	100
BS16	16	30.0	5.6	7.5	100
BS25	25	35.0	7.0	9.4	100
BS35	35	40.0	8.2	10.6	100
BS50	50	44.0	9.5	12.0	100
BS70	70	44.0	11.5	14.7	50
BS95	95	46.0	13.5	16.7	50
BS120	120	50.0	15.0	19.0	50
BS150	150	54.0	16.5	21.0	50
BS185	185	56.0	18.5	23.0	20
BS240	240	58.0	21.0	26.0	20
BS300	300	60.0	23.0	28.0	20
BS400	400	63.0	27.0	32.0	10
BS500	500	135.0	30.0	38.1	10
BS630	630	135.0	33.8	44.0	10
BS800	800	135.0	38.0	49.0	10
BS1000	1000	135.0	42.5	53.0	10