

Mainline Track Range

Installation instructions for JC14070 convertor for track to surface mount



Warnings & Cautions

- To avoid electric shock, serious injury or property damage, isolate power before installing, removing or servicing the product.
- It is recommended that this product is installed by a qualified electrician to ensure the installation complies with the local current wiring regulations.
- JCC will not accept responsibility for claims arising from sub-standard installations; which will void the warranty.
- It may be necessary to upgrade your MCBs to allow for increased inrush current.
- Read instructions and check that you have all of the tools and accessories required to complete the installation correctly. Isolate power supply before starting the installation.
- This product is designed for connection to a 240V~ 50Hz.
- This product is suitable for indoor use only.

INSTALLATION

ENGLISH

240V 50Hz Class I Ⓢ

Available in black and white

The mounting plate has been designed to work with JCC Mainline Track fittings only. Please ensure that the installation does not infringe on water pipes or any other electrical services. It is recommended that the room ambient temperature should not exceed 30°C and that there is also adequate free ventilation around the fitting.

Note: this product is Class I and must be earthed.


Pay attention to markings when identifying polarity and locking of the track adaptor. Place lamps in lamp holders, observe min. distance from nearest illuminated surface. Turn mains supply on and test the luminaires.

Note: further adjustment of the beam direction should be done with care as the lamps will get hot.


Installation procedure

1. Secure the ceiling mounting bracket with suitable fixings.
2. Connect the cables from the converter to the lighting circuit as illustrated in Fig. 1.
3. Fit the main body of the converter to the ceiling mount bracket using the 2 x 4mm screws provided.
4. Once the Converter is securely mounted, then fit your chosen Mainline fitting.

Ceiling Mounting Bracket
c/w Earth Lead

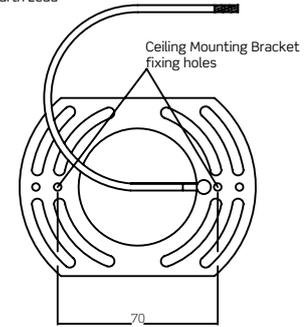


Example of a
Typical Application

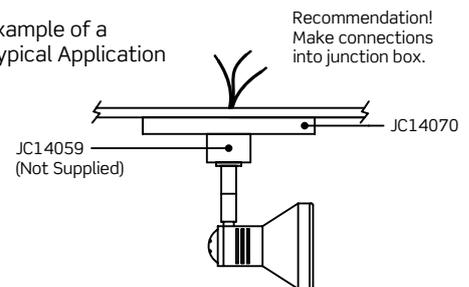


Recommendation!
Make connections
into junction box.

Fig. 1

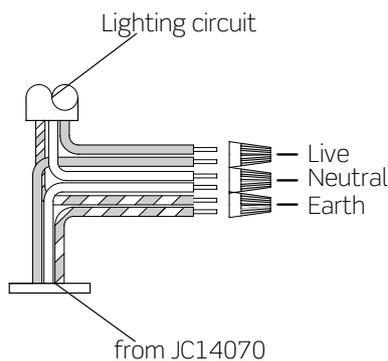

Profile & Dimensions

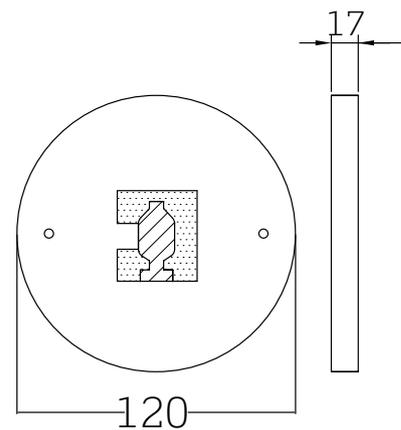

All dimensions in millimetres

You can help protect the environment. Please remember to respect the local regulations: hand in the non-working electrical equipment to an appropriate waste disposal centre. The packaging material is recyclable. Dispose of the packaging in an environmentally friendly manner and make it available for the recyclable material collection service.



IP20 jcc.co.uk

Important warranty information

This product is supported by a 2-year standard warranty. (See website for terms and conditions).

BS EN ISO9001 - 2015 - Registered Firm Certificate No. GB 1552

JCC Lighting Products Ltd. Innovation Centre, Beeding Close, Southern Cross Trading Estate, Bognor Regis, West Sussex, PO22 9TS, United Kingdom

Technical Support: +44(0)1243 838986 Customer Services: +44(0)1243 838999

V4_Feb_2021_GL