

# Mainline Track Range

Installation instructions for JC14009 power feed at track end with conduit entry

**JCC** | a **LEVITON** company

## Warnings & Cautions

- To avoid electric shock, serious injury or property damage, isolate power before installing, removing or servicing the product.
- It is recommended that this product is installed by a qualified electrician to ensure the installation complies with the local current wiring regulations.
- JCC will not accept responsibility for claims arising from sub-standard installations; which will void the warranty.
- It may be necessary to upgrade your MCBs to allow for increased inrush current.
- Read instructions and check that you have all of the tools and accessories required to complete the installation correctly. Isolate power supply before starting the installation.
- This product is designed for connection to a 240V~ 50Hz 5 Amp max.
- This product is suitable for indoor use only.

## INSTALLATION

ENGLISH

### 240V 50Hz 16 Amp max. Class I Ⓢ

Available in black and white

Please note that both the internal profile of the track sections and the external profile of the connectors are asymmetrical: this feature has been incorporated to ensure the overall polarity of the system, i.e. phase can only be connected to phase and neutral will only connect to neutral (see Fig. 1a).

The JC14009 is supplied with the option for surface and conduit cable entry.

1. Undo the cover retaining screw and remove it. This will reveal the internal wiring.
2. Remove the appropriate knock out plate depending on required cable entry.
3. The terminals are marked P for phase and N for neutral and green for earth.
4. Connect Live (Brown) to Phase, Neutral(Blue) and Earth (Green/Yellow) to the Earth tag.
5. Attach the cover and remove the supplied dead end from the track and then the JC14009 is ready to insert into the track.
6. Once the JC14009 is located into the track section ensure that the locking screw is tightened.

You can help protect the environment. Please remember to respect the local regulations: hand in the non-working electrical equipment to an appropriate waste disposal centre. The packaging material is recyclable. Dispose of the packaging in an environmentally friendly manner and make it available for the recyclable material collection service.

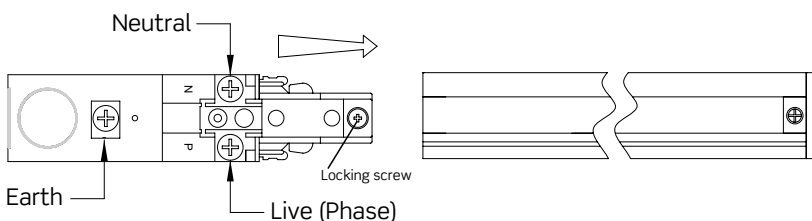


Fig. 1a



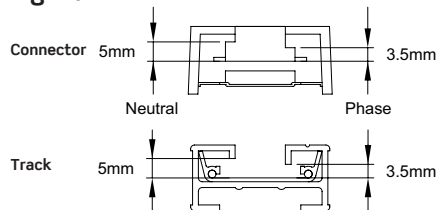


Fig. 1b

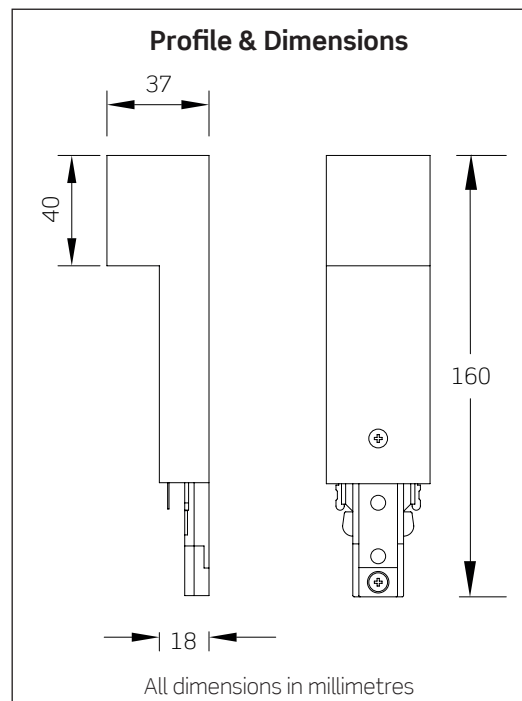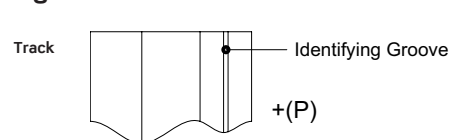

## Important warranty information

This product is supported by a 2-year standard warranty. (See website for terms and conditions).

BS EN ISO9001 - 2015 - Registered Firm Certificate No. GB 1552  
JCC Lighting Products Ltd. Innovation Centre, Beeding Close, Southern Cross Trading Estate, Bognor Regis, West Sussex, PO22 9TS, United Kingdom  
**Technical Support: +44(0)1243 838986 Customer Services: +44(0)1243 838999**

V4\_Feb\_2021\_GL

UK CA CE RoHS Compliant IP20 jcc.co.uk