



LET'S GET
YOU SET UP

USER GUIDE



Download the SmartKnight App

On Google Play (Android™) or App Store® (Apple®).
Open the app, tap "Register" and follow the on-screen instructions



Add Device

(2.4 Ghz only)

To add a device tap the "+" on top right corner, select the product category and follow the on-screen instructions



Enjoy

Enjoy your connected product. For more in-depth instructions, please see section titled "Wi-Fi Control" in this leaflet



Setting up Voice Assistants

works with | 

works with |  Hey Google

Enable the "SmartKnight" skill in either voice assistant and follow the app instructions to control your device(s) with your voice.

Visit <http://www.mlaccessories.co.uk> for further assistance



INSTALLATION & MAINTENANCE MANUAL

RW6KW / RW6KRGBW

GENERAL INSTRUCTIONS

These instructions should be read carefully and retained after installation by the end user for future reference and maintenance.

**These instructions should be used to aid the installation of the following products:
RW6KW / RW6KRGBW**

SAFETY


- This product must be installed in accordance with the latest edition of the IEE Wiring Regulations (BS7671) and current Building Regulations. If in any doubt, consult a qualified electrician
- Please isolate mains prior to installation or maintenance
- Check the total load on the circuit (including when this luminaire is fitted) does not exceed the rating of the circuit cable, fuse, or circuit breaker
- Please note the IP (Ingress Protection) rating of this luminaire when deciding the location for installation
- If used under insulation, the insulation should be laid unbroken over the luminaire (not packed around it). Only mineral wool style insulation may be used
- This product is for indoor use only
- This product is Class II double insulated
- This product is IP65 rated (IP20 from above)

INSTALLATION

Note – Please note that these luminaires are incompatible with dimmers.


- Provide power to the required point of installation
- Cut a suitable hole in the mounting surface as per the cut-out details (see Fig. 1) ensuring not to infringe with any joists, gas/water pipes or electrical cables

Fig. 1



- Insert a flat-head screwdriver into the access slots on the rear of the driver then carefully push to remove the cover to access the mains terminal block
- Connect the luminaire to the mains supply ensuring the correct polarity is observed (see Fig. 2):
L - Live (Brown), E - Earth (Green/Yellow), N - Neutral (Blue). The earth terminal is non-functional and only provided for convenience. For RW6KW only, two cables can be inserted into the push-fit terminal block to achieve loop in/loop-out wiring

Fig. 2

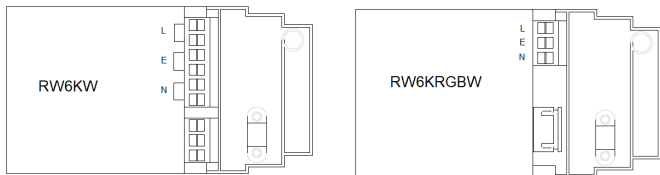

- Refit the terminal cover securely
- To change the bezel, turn anti-clockwise and remove, align the new bezel with the front of the luminaire and turn clockwise
- Lift both of the spring clips on the sides of the luminaire and push into the ceiling
- Switch on and check for correct operation

Note – Please note that it is normal for the luminaire to flash when switched on for the first time. When the luminaire is flashing, it means that it is in pairing mode.


WARNING

This product must be disconnected from the circuit if subjected to any high voltage or insulation resistance testing. Irreparable damage will occur if this instruction is not followed.

GENERAL

This product contains a light source of energy efficiency class D to Regulation (EU) No. 2019/2015 and (UK) 2021 No. 1095.

This product contains a non-replaceable LED light source and a non-replaceable control gear.



Clean with a soft dry cloth only, do not use aggressive cleaning products or solvents which may damage the product.

This product is dimmable via app only.

This product should be dismantled for disposal when it reaches the end of its life. Please see website for dismantling instructions.

This product should be recycled in the correct manner when it reaches the end of its life. Check local authorities for where facilities exist.

WI-FI CONTROL

- Download the SmartKnight app on Google Play or the App Store®
- Once the app is downloaded, open the app and tap "Register" then follow the on-screen instructions
- To add a luminaire to the app, switch on the power to the fitting and tap "+" on the top right corner
- Select "**Lighting**"
- Connect to the desired Wi-Fi network and tap "**Next**". Please note only 2.4 GHz networks are supported and make sure your device is connected to the same Wi-Fi network

- If the light is flashing rapidly, skip the reset procedure and tap "**Confirm the light is flashing rapidly**" and then tap "**Next**". If the light is not flashing, follow the on-screen instructions to reset it
- After the luminaire has been added successfully to the app, it can be named and added to a room. After naming the luminaire, tap "**Done**"

ADDITIONAL ACCESSORIES

Code	Model
RW6BC	Bezel - Brushed Chrome
RW6C	Bezel - Chrome
RW6MB	Bezel - Matt Black
RW6MW	Bezel - Matt White



Code	Model
RW6FBC	Flat Bezel - Brushed Chrome
RW6FC	Flat Bezel - Chrome
RW6FMB	Flat Bezel - Matt Black
RW6FMW	Flat Bezel - Matt White
RW6FBR	Flat Bezel - Brass



WARRANTY

This product has a warranty of 2 years from date of purchase. Failure to install this product in accordance with the current edition of the IEE Wiring Regulations (BS7671), improper use, or removal of the batch code will invalidate the warranty. If this product should fail within its warranty period, it should be returned to the place of purchase for a free of charge replacement. ML Accessories does not accept responsibility for any installation costs associated with the replacement product. Your statutory rights are not affected. ML Accessories reserve the right to alter product specification without prior notice.

Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates.

Google, Android and Google Play are trademarks of Google LLC.



Supplied By:

(UK) Manufacturer

ML Accessories Ltd, Unit E Chiltern Park,
Boscombe Road, Dunstable LU5 4LT,
www.mlaccessories.co.uk

(EU) Authorised Representative
nnuks Holding GmbH, Niederkasseler
Lohweg 18,
40547 Düsseldorf, Germany,
Email: eprel@nnuks.com



Manufacturers Declaration of Conformity
For ML Accessories (Knightsbridge)
Electrical products in accordance with CE marking

ML Accessories Ltd. Declare that all products have been designed, manufactured, and tested in accordance with the requirements of the relevant legislation

CE marking legislation

In Accordance with the following Directives:

2014/35/EU	Low Voltage Directive
2014/30/EU	EMC Directive
2014/53/EU	Radio Equipment Directive

Including Legislation

1907/2006	REACH
2015/863	RoHS
2021/341	ERP

Safety Standards

Full individual declarations and specific safety standards applicable to relevant product series can be found on our website www.mlaccessories.co.uk

We hereby declare that the equipment named above has been designed to comply with the relevant sections of the above referenced specifications. The product complies with all essential requirements of the directives.

Scott Brewer
Technical Manager

Catherine Connolly
CEO



ML Accessories Ltd. Unit E Chiltern Park, Boscombe Road, Dunstable. Bedfordshire, LU5 4LT

This declaration becomes invalid if technical or operational modifications are introduced without ML Accessories Ltd. written consent.



Manufacturers Declaration of Conformity
For ML Accessories (Knightsbridge)
Electrical products in accordance with UKCA marking

ML Accessories Ltd. declare that all products have been designed, manufactured, and tested in accordance with the requirements of the relevant legislation

UKCA marking legislation

UK SI 2016 No. 1091	Electro Magnetic Compatibility Regulations 2016
UK SI 2016 No. 1101	The Electrical Equipment (Safety) Regulations 2016
UK SI 2012 No. 3032	Restriction of the use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012
UK SI 2017 No. 1206	Radio Equipment regulations 2017
UK SI 2021 No. 1095	The Ecodesign for Energy-Related Products and Energy Information (Lighting Products) Regulations 2021

Included Legislation

UK SI 2008 No. 2852	UK REACH
UK SI 2013 No. 3113	WEEE

Safety Standards

Full individual declarations and specific safety standards applicable to relevant product series can be found on our website www.mlaccessories.co.uk

We hereby declare that the equipment named above has been designed to comply with the relevant sections of the above referenced specifications. The products comply with all essential requirements of the directives.

Scott Brewer
Head of Technical

Catherine Connolly
CEO



ML Accessories Ltd. Unit E Chiltern Park, Boscombe Road, Dunstable. Bedfordshire, LU5 4LT