

## START Highbay - entry level

START Highbay IP65 15000lm 840 WB  
0039615



### Product features

- Integrated LED highbay; White aluminium housing; 15500Lm; 135W; 115Lm/W; 4000K; Drive current: 620mA; CRI 80; 95° beam angle; IP65; IK08; Lifespan L70:B50 90,000 hrs; (D x H) 310 x 141 mm; D-mark.



## PRODUCT OVERVIEW

Product name	START Highbay IP65 15000lm 840 WB
Technology	LED
General application	Logistics & Industry
ETIM Class	EC001716
E-number FI	4357084
Warranty	5 years
Fixture luminous flux (lm)	15500
Luminaire efficacy (lm/W)	115
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Photobiological Risk Group	RG1
Total power consumption (W)	135
Electrical protection	Class I
Dimmable	No
LED Flickering Rate	Low (6% - 20%)
Housing colour	RAL 9006 - Aluminium
IP rating	IP65
IK rating	IK08
Product EAN number	5410288396156

## DATA TABLE

### General data

Product name	START Highbay IP65 15000lm 840 WB
Technology	LED
General application	Logistics & Industry
Operating temperature range (°C)	-20°C - 45°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001716
E-number FI	4357084

## START Highbay - entry level

START Highbay IP65 15000lm 840 WB  
0039615

Warranty 5 years

### Optical data

Fixture luminous flux (lm)	15500
Luminaire efficacy (lm/W)	115
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Photobiological Risk Group	RG1

### Electrical data

Total power consumption (W)	135
Mains voltage (V)	220-240V~
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	10
Electrical protection	Class I
Dimmable	No
Drive current (mA)	620
Inrush Current (A)	80
Inrush Duration (µs)	700
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	F
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Low (6% - 20%)
Max. Luminaires per 10A C Breaker	8
Max. Luminaires per 13A C Breaker	11
Max. Luminaires per 16A C Breaker	5
Max. Luminaires per 20A C Breaker	9
Max. Luminaires per 10A B Breaker	11
Max. Luminaires per 13A B Breaker	14
Max. Luminaires per 16A B Breaker	5
Max. Luminaires per 20A B Breaker	18

### Lifetime data

Lifespan L70 B50	90000
Lifespan L70 B20	90000
Lifespan L70 B10	90000
Lifespan L80 B50	75000
Lifespan L80 B20	62000
Lifespan L80 B10	57000
Lifespan L90 B50	35000
Lifespan L90 B20	30000
Lifespan L90 B10	27000

### Physical data

Housing colour	RAL 9006 - Aluminium
IP rating	IP65

## START Highbay - entry level

START Highbay IP65 15000lm 840 WB  
0039615

<b>IK rating</b>	IK08
<b>Nominal Product Height (mm)</b>	141
<b>Nominal Product Diameter (mm)</b>	310
<b>Weight (kg)</b>	2.175





### Packaging

<b>Single packaging type</b>	Carton
<b>Product EAN number</b>	5410288396156
<b>Packaging single length / height (cm)</b>	32.5
<b>Packaging single width (cm)</b>	32.5
<b>Packaging single depth (cm)</b>	12.5
<b>DUN14 (outer)</b>	05410288396156
<b>Units per outer package</b>	1
<b>Packaging outer length / height (cm)</b>	32.5
<b>Packaging outer width (cm)</b>	32.5
<b>Packaging outer depth (cm)</b>	12.5

### Safety data

<b>Optimal operating condition (°C)</b>	-20-45
---	--------

## PHOTOMETRY

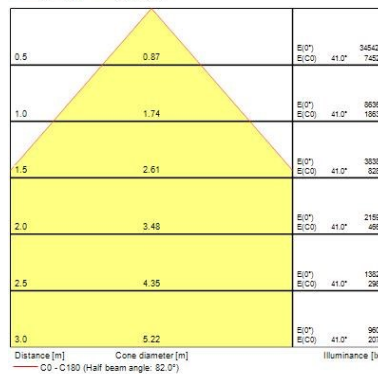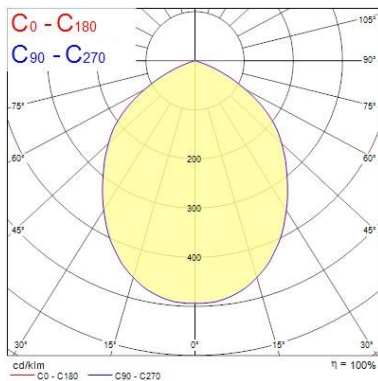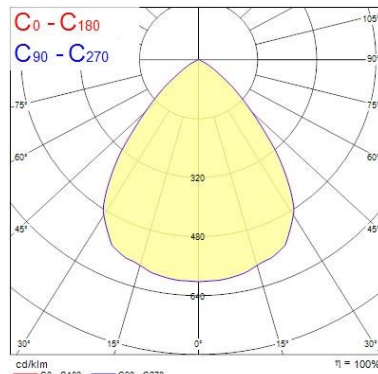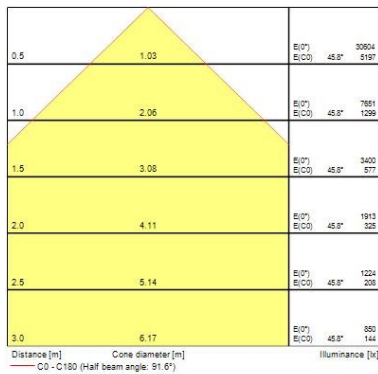

START Highbay - entry level  
*START Highbay IP65 15000lm 840 WB*  
0039615

---

## TECHNICAL DRAWINGS

---

