

AEDELED50/WW



Features

Compact and economic aluminium LED floodlight

Only suitable for semi commercial applications

50W comparable light output of 70W HQI

Bracket design allows installation without removing mounting bracket

Pre-wired with 1 metre of rubber insulated cable for ease of installation

Cool white and warm white options avaibale

LED lifespan L90 36,000 hours

Non-dimmable

Non-dimmable



Belfast: +44 (0) 2890 773750

General Information

LED
Black
IP65
IK06
1
Internal/External
Surface
2
Yes
175
197

Technical Information

Wattage	50W
Lumens Delivered	3917lm
Lm/W	78lm
CRI	Ra 80
ССТ	3000K
Input	220-240V
Hertz	50/60hz
Operating Temp	-20 to 40




Technical Data - ETIM - Downlight/spot/floodlight (EC001744)

Suitable for surface mounting	Yes
Suitable for built-in mounting	No
Suitable for wall mounting	Yes
Suitable for suspended mounting	No
Suitable for ceiling mounting	No
Suitable for traverse mounting	No
Suitable for light-track mounting	No
Adjustability	Swivelling
With movement sensor	No
With light sensor	No
With light source	Yes
Material housing	Aluminium
Nominal voltage	220-240 V
Control gear included	Yes
No dim function	Yes
Degree of protection (IP)	IP65
Impact strength	IK06
Protection class	I
Max. system power	50 W
Colour of light	White
Colour temperature	3000-3000 K
Colour rendering index CRI	80-89
Rated luminous flux acc. IEC 62722-2-1	3917 lm
Lamp efficacy	78 lm/W
Width	35 mm



Height/depth	175 mm
Length	197 mm

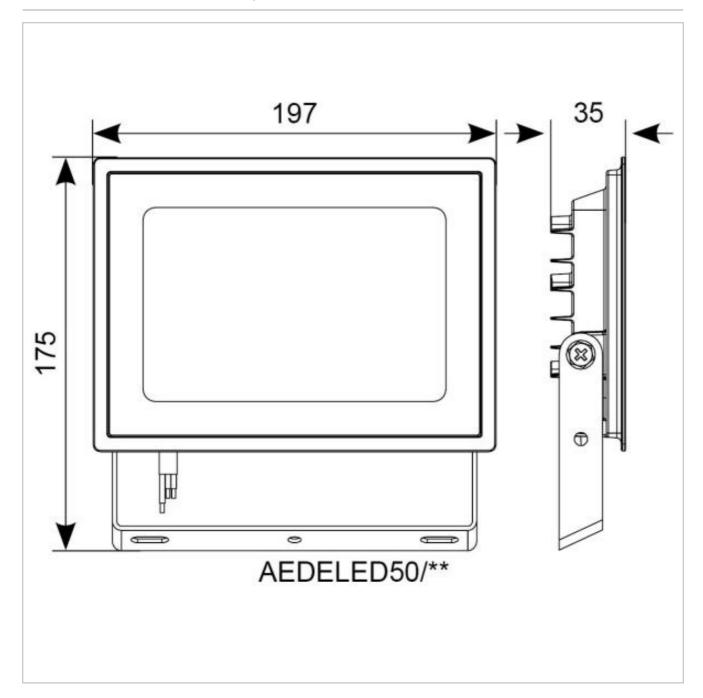

Datasheet generated from https://onetimepim.com last updated Monday, September 6, 2021 1:24:57 PM

