
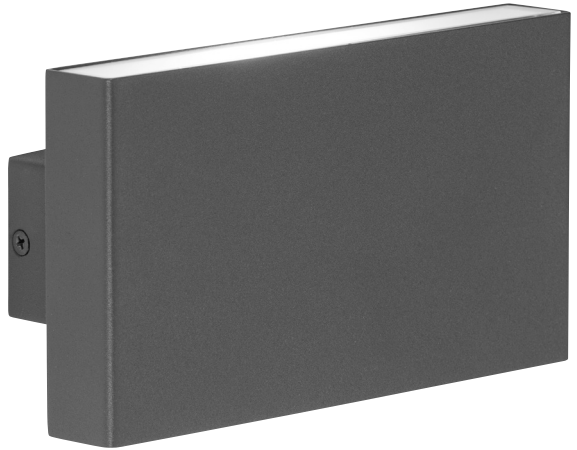


INSTALLATION & MAINTENANCE MANUAL  
WSS8 / WSM16 Series

---

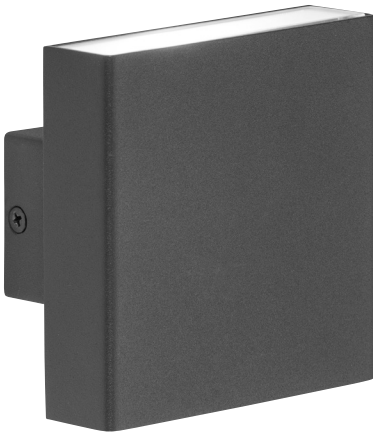

## GENERAL INSTRUCTIONS

These instructions should be read carefully and retained after installation by the end user for future reference and maintenance.

These instructions should be used to aid installation of the following products:

WSS8A / WSS8W / WSS8BC / WSM16A / WSM16W / WSM16BC

## SAFETY

- Installation of this luminaire should only be carried out by a qualified electrician or competent person to the latest Building and current IEE Wiring Regulations (BS7671)
- Please isolate mains prior to installation/maintenance
- Check the total load on the circuit (including when this luminaire is fitted) does not exceed the rating of the circuit cable, fuse or circuit breaker
- Please note the IP (Ingress of Protection) rating of this luminaire when deciding the location for installation
- This product series is Class I and requires an earth
- This product series is IP54 rated
- This product is non-dimmable

## INSTALLATION

- Provide power to the required point of installation. Suitable IP rated junction boxes should be used where required
- Remove the 2 screws at either end of the fitting securing the base plate of the luminaire (see Fig 1)

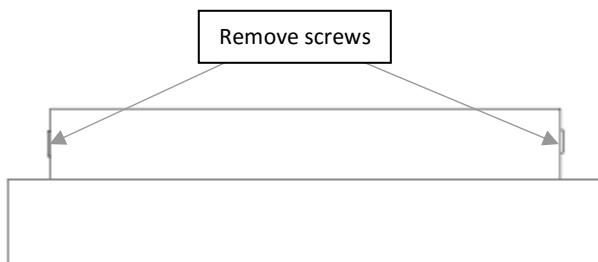
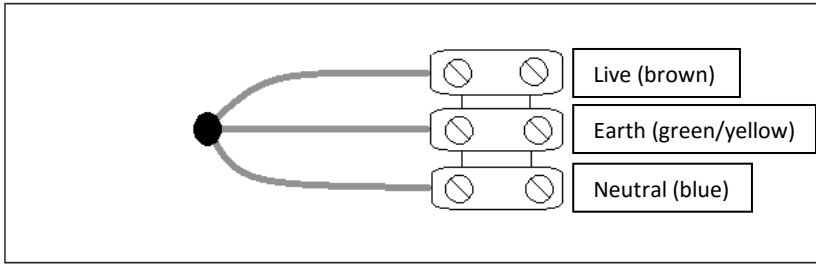


Fig 1

- Using the base plate as a template, mark and drill the holes ensuring not to infringe with any joists, gas / water pipes or electrical cables
- Feed mains cable through the rubber grommet to retain IP rating, and secure base plate to the desired surface
- Ensuring correct polarity is observed, carefully wire as shown in Fig 2



**Fig 2**

- Secure the fitting to the mounted base plate and fasten the 2 screws
- Switch on and check for correct operation

## WARNING

This product is unsuitable for installation in or near coastal and marine environments.  
Do not use any source of high pressure washers to maintain or clean this luminaire.

## GENERAL

The unit should be recycled in the correct manner when it reaches the end of its life. Check local authorities for where facilities exist.

Clean with a soft dry cloth only, do not use aggressive cleaning products or solvents which may damage the fitting.

A light film of acid free oil is recommended after installation and maintained periodically (2-3 times a year) to aid corrosion prevention on metal finished products only.

## WARRANTY

This product has a warranty of 3 years from date of purchase. Failure to install this product in accordance with the current edition of the IEE Wiring Regulations, improper use, or removal of the batch codes will invalidate the warranty. If this product should fail within its warranty period it should be returned to the place of purchase for a free of charge replacement. ML Accessories does not accept responsibility for any installation costs associated with the replacement product. Your statutory rights are not affected. ML Accessories reserve the right to alter product specification without prior notice.

# Knightsbridge<sup>®</sup>

the mark of quality



ML Accessories Limited  
LU5 5TA  
[www.mlaccessories.co.uk](http://www.mlaccessories.co.uk)

SBMAR17\_V1