


Contact us at Zano Controls,
 Unit 1 Chantry Court,
 Wrythe Lane,
 Carshalton,
 Surrey,
 SM5 2DG.
 Tel: 0845 519 5858
 Fax: 0845 519 5757
 email: sales@zanocontrols.co.uk



ZGRIDLED+ TECH SHEET
 MADE IN GREAT BRITAIN

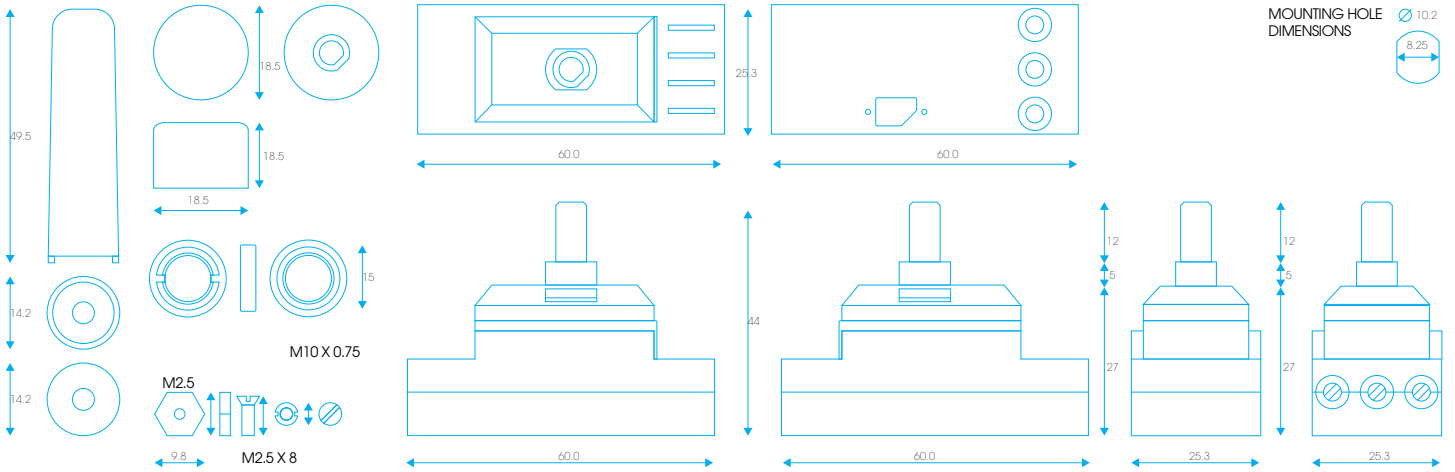

NEUTRAL REQUIRED	NO
FLOURESCENT COMPATIBLE	NO
GU10 MAINS HALOGEN COMPATIBLE	NO
LV TRANSFER COMPATIBLE	NO
2-WAY SWITCH	YES
ON / OFF OPERATION STYLE	PUSH ON / PUSH OFF
DIMMING OPERATION	ROTARY


OVERLOAD PROTECTION	YES
SMART SETTINGS	YES
DB NOISE DURING OPERATION	- 110 DBA
SOFT START	YES
SUPPLY VOLTAGE	110V- 240V AC
FREQUENCY RANGE	40 - 50Hz +/- 10%
OPERATING TEMPERATURE UNDER FULL LOAD	70° C
HUMIDITY RANGE	95% NON CONDENSING
MAX AMBIENT TEMPERATURE	40° C
MINIMUM AMBIENT TEMPERATURE	0° C
MAX LOAD	250W LED
MIN LOAD	5W LED
TERMINAL TORQUE MAX SETTING	0.4 NM
MAX TERMINAL CAPACITY	3mm
MAX SWITCHING CAPACITY	4A RESISTIVE

MAXIMUM PLATE LOAD RECOMMENDATIONS

COVER PLATE SIZE (WXH)	LED
SINGLE GANG 76MM X 76MM	250W
DOUBLE GANG 137MM X 76MM	360W*

*If you are fitting more than two dimmers in the same box each dimmer must be de-rated to a maximum load of 160w per dimmer.

DIMMER

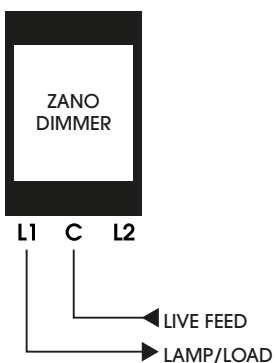

2-WAY SWITCH AND DIMMER

