

Residential - mPro™ Adjustable Fire Rated

mPRO™ ADJUSTABLE



Description

IP65, Adjustable, integrated, fire rated 7W LED downlight with unique convertible design to fit ceiling voids as shallow as 47mm. Incorporated miniaturised NanoDrive™ power supply. Available in 2700K, 3000K and 4000K, mPro™ delivers up to 94lm/W making it the most efficient fire rated downlight on the market. Available in White, Matt White, Polished Chrome and Satin Nickel. Fitted with 60° lens. Insulation cover and FastRFix™ rapid install system connector included. Rated to 30, 60 and 90 minute fire ceilings. Class 2 rated with floating earth terminal. Complies with BS EN 1365-2: 2014 (fire resistance), BS EN ISO 10140-2: 2010 & BS EN ISO 10140-3: 2010 + A1: 2015 (acoustics), BS EN 13141-1:2004 (Air leakage). **5 year extended warranty** - register at auroralighting.com/warranty



IC COVER IS INCLUDED WITH THE DOWNLIGHT


DALI Dimmable
BUS+
Interface Module
Broadcast Command

IP65 ADJUSTABLE MODULE



Specification			
Technology	LED	IP Rating	IP65
Colour Rendering (Ra)	>80	Air Leakage	Yes
Luminaire Distribution	Direct	Fire Protection	Yes
Lifetime L70 (hrs)	40,000	Acoustic Rated	Yes
Input Voltage	220-240V	Operating Temp	25°C
Input Frequency (Hz)	50-60	Optic Material	PMMA
Dimmable	Yes	Power Factor	0.85
DALI	DALI Bus	SDCM	<6

60° Lens (Standard)



SKU Code	Wattage	Luminous Flux	Efficacy LL/CW	Colour Temp (K)	Cutout (Ø)
----------	---------	---------------	----------------	-----------------	------------

Dimmable

AU-MPRO2*/27	7W	600lm	86	2700K	85mm
AU-MPRO2*/30	7W	630lm	90	3000K	85mm
AU-MPRO2*/40	7W	660lm	94	4000K	85mm




*Add Suffix **W, MW, PC** or **SN** for White, Matt White, Polished Chrome or Satin Nickel finishes


Adjustable version supplied with Bezel

Emergency Options

AU-FRLM10EM 3 Hour Maintained LED Emergency Pack



(OD) 98mm Overall Ø
(RD) 98mm Recess Depth
(RD) 47mm Recess Depth (when converted, subject to ceiling thickness)

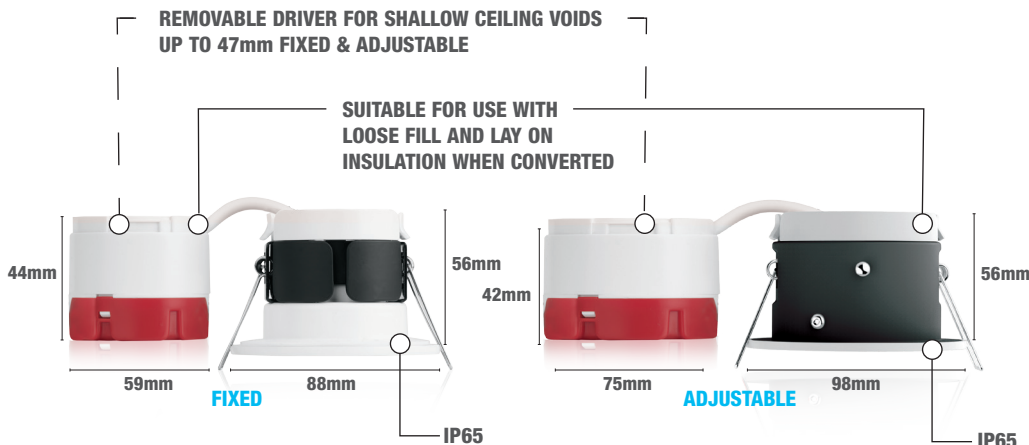

AU-FRLM10EM
3 Hour Maintained Emergency LED Pack



SEPARATE EMERGENCY PACK