



Zigbee mPro™ ZX Tuneable White

The ultimate smart fire rated lighting upgrade!
 'Smart Inside' for individual wireless and group control
 Direct replacement - convenient one-step installation

Application Overview

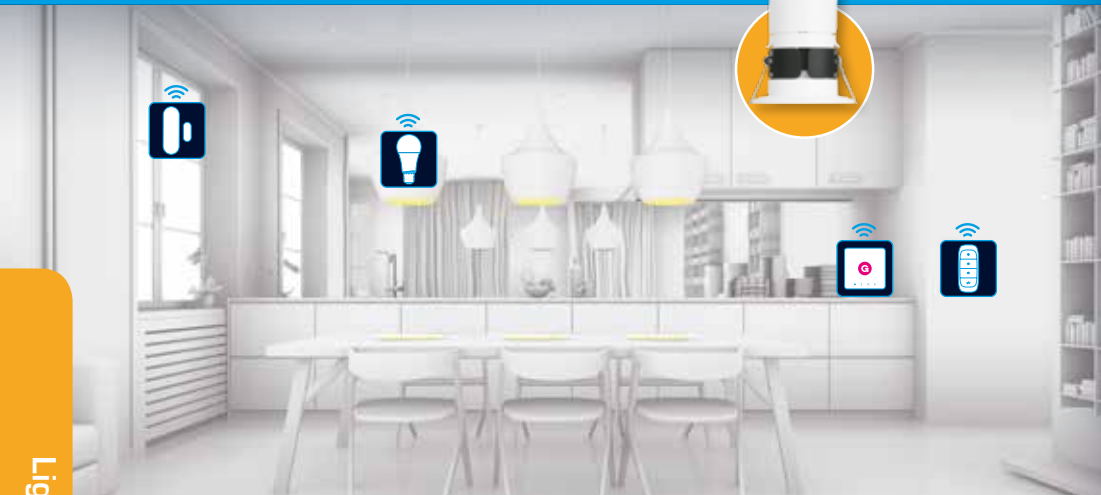

SmartTip
 Combine LED strip & GLS lamps for synchronised colour tuning



Lighting

3 Step Simple Install



1
 Replace Existing Non-Smart Downlight with mPro™ ZX




2
 Pair mPro™ ZX to AOne™ Hub via App



3
 Take Control via App or Wall

mPRO™ ZX

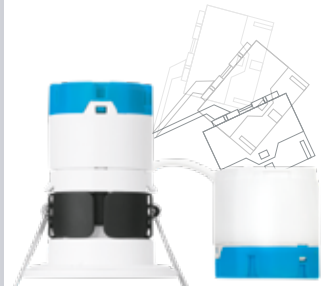

Convertible Body for Recess voids as low as 56mm
 (Granted Patents GB2543558B, GB2543664B)

One Downlight Multiple Moods

Fully dimmable, Colour Tuneable - Matches light output to environment & time of day



2200K

5000K

This product is compatible with



Discover more
auroralighting.com/aone

² Requires Amazon or Google hardware. Visit website for information.

5 Year Warranty

L70 40,000hrs

On/Off, Dimmable and
Tuneable White control

White, Matt White, Polished
Chrome & Satin Nickel
bezel finish options

White slimtrim bezel
finish option

Black or White trimless
bezel finish options



requires

.hub


Zigbee Smart HUB
See pg.17



works with

.control

Kinetic Controller
See pg.27



Remote Control
See pg.29




.sense

Door/Window
Sensor
See pg.41



PIR Sensor
See pg.41



AU-A1ZBMPPRO1ZX
(H) 110mm Height
(OD) 88mm Overall (Ø)



See pg.218-219
for compatibility table

Zigbee Smart Tuneable White Fire Rated Downlight

LEDchroic™ lens provides halogen appearance with LED
efficiency, anti-glare and precise beam control

Delivering 98lm/W

10-100% Dimming range

Tuneable white colour temperature between 2200-5000K

60° beam angle for maximum light distribution

Interchangeable IP65 bezels to provide a sleek finish

FastRFix™ rapid install system connector included - See page
213 for more information

Can be used in lighting scenes and within lighting schedules

Tested in 30, 60 and 90-minute fire rated ceilings

mPRO™ZX



mPro™ZX Tuneable White Fire Rated Downlight

2200K 5000K
520lm 640lm



AIR leakage
(excluding
adjustable)

Cat. No.	Watts	Colour	Lumens	lm/W	Beam	Cutout [Ø]
AU-A1ZBMPPRO1ZX	6.5W	2200-5000K	640lm	98	60°	65mm

Bezel Options

AU-BZ600*	mPro™ Fixed IP65 Aluminium Downlight Bezel
AU-AP600*	mPro™ Fixed Fire Rated Adaptor Plate
AU-BZ605W	mPro™ Fixed Slimtrim Aluminium Baffle Bezel
AU-MPROTL**	mPro™ Fixed Trimless Bezel

*Add suffix **W**, **MW**, **PC** or **SN** for White, Matt White, Polished Chrome or Satin Nickel finishes.

Add suffix **W or **BLK** for White or Black finishes.

See pg. 44 for bezel options



Lumen value stated in table
is based on 5000K

5 Year Warranty

L70 40,000hrs

Triac dimmable as standard

Emergency option

White, Matt White, Polished Chrome & Satin Nickel bezel finish options

White slimtrim bezel finish option


Black or White trimless bezel finish options




Triac Inline Dimmer
See pg.31





Smart Rotary Dimmer
See pg.25



AU-MPRO1



AU-MPRO5

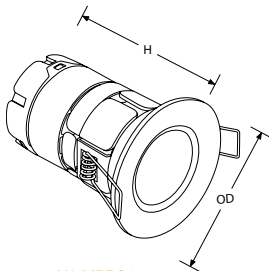

AU-MPRO1

(H) 100mm Height
(OD) 88mm Overall (Ø)

AU-MPRO2

(H) 98mm Height
(OD) 98mm Overall (Ø)

AU-MPRO5

(H) 120mm Height
(OD) 88mm Overall (Ø)

mPRO™

LED fixed/adjustable/baffle fire rated downlights

LEDchroic™ lens provides halogen appearance with LED efficiency, anti-glare and precise beam control

Unique convertible design to fit ceiling voids as shallow as 47mm

Delivering up to 94lm/W

Interchangeable IP65 bezels for fixed version provide a sleek finish

IP65 rated for adjustable and baffle option

SDCM <6 providing consistent light colour quality

FastRFix™ rapid install system connector included - See page 213 for more information

Insulation cover included

60° beam angle for focused downlighting

Tested in 30, 60 and 90-minute fire rated ceilings



For Dimming Compatibility See pg.224-225



Fixed IP65



IP65 Adjustable



IP65 Fixed Baffle



Cat. No.	Watts	Colour	Lumens	lm/W	Beam	Cutout [Ø]
mPRO™ Triac Dimmable Fixed (IP65 when used with IP65 Bezel)						
AU-MPRO1/27	7W	2700K	560lm	80	60°	65mm
AU-MPRO1/30	7W	3000K	600lm	86	60°	65mm
AU-MPRO1/40	7W	4000K	640lm	91	60°	65mm
mPRO™ Triac Dimmable IP65 Adjustable						
AU-MPRO2*/30	7W	3000K	630lm	90	60°	85mm
AU-MPRO2*/40	7W	4000K	660lm	94	60°	85mm
mPRO™ Triac Dimmable IP65 Baffle						
NEW AU-MPRO5/30	7W	3000K	500lm	71	40°	65mm
NEW AU-MPRO5/40	7W	4000K	530lm	76	40°	65mm

Bezel Options

AU-BZ600* mPro™ Fixed IP65 Aluminium Downlight Bezel

AU-AP600* mPro™ Fixed Fire Rated Adaptor Plate

AU-BZ605W mPro™ Fixed Slimtrim Aluminium Baffle Bezel

NEW AU-MPROTL** mPro™ Fixed Trimless Bezel

*Add suffix **W**, **MW**, **PC** or **SN** for White, Matt White, Polished Chrome or Satin Nickel finishes.

Add suffix **W or **BLK** for White or Black finishes.

3 hour Emergency pack AU-FRLM10EM available.

