

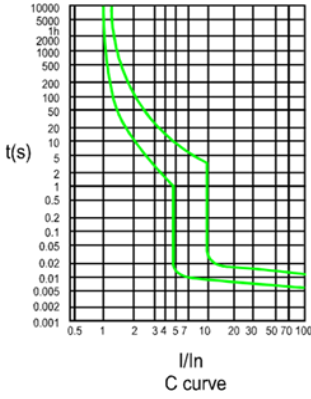

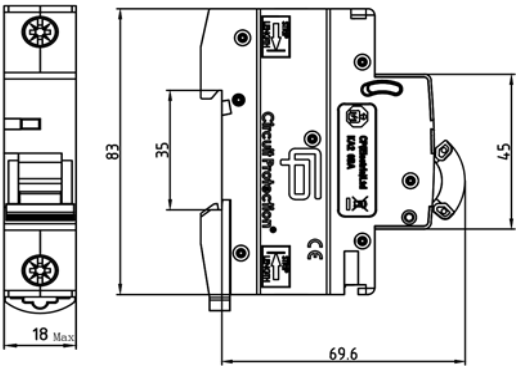








<h1>FuseBox®</h1>		BARCODE  5 060523 520305																																		
Miniature Circuit Breaker (6kA) MT06C201 																																				
TECHNICAL		TRIPPING CHARACTERISTICS																																		
<table border="1"> <thead> <tr> <th>Specification</th> <th>MCB</th> </tr> </thead> <tbody> <tr> <td>Standard</td> <td>BS EN 60898-1</td> </tr> <tr> <td>Number of Poles</td> <td>1</td> </tr> <tr> <td>Tripping Characteristics</td> <td>B curve= 3-5In C curve= 5-10In</td> </tr> <tr> <td>Tripping Type</td> <td>Thermal Magnetic</td> </tr> <tr> <td>Rated Breaking Capacity (Icu)</td> <td>6kA</td> </tr> <tr> <td>Rated Current (In)</td> <td>1 - 63A</td> </tr> <tr> <td>Rated Voltage (Un/AC)</td> <td>230V</td> </tr> <tr> <td>Residual Current Characteristics</td> <td></td> </tr> <tr> <td>Rated Residual Operating Current (IΔn)</td> <td></td> </tr> <tr> <td>Frequency (Hz)</td> <td>50/60</td> </tr> <tr> <td>Mechanical Endurance</td> <td>20,000</td> </tr> <tr> <td>Protection Degree</td> <td>IP20</td> </tr> <tr> <td>Terminal Size (mm²)</td> <td>1 - 16</td> </tr> <tr> <td>Tightening Torque (Nm)</td> <td>2.5</td> </tr> <tr> <td>Operating Temperature °C</td> <td>-25~ +40°C</td> </tr> <tr> <td>Storage Temperature °C</td> <td>-25~ +70°C</td> </tr> </tbody> </table>	Specification	MCB	Standard	BS EN 60898-1	Number of Poles	1	Tripping Characteristics	B curve= 3-5In C curve= 5-10In	Tripping Type	Thermal Magnetic	Rated Breaking Capacity (Icu)	6kA	Rated Current (In)	1 - 63A	Rated Voltage (Un/AC)	230V	Residual Current Characteristics		Rated Residual Operating Current (IΔn)		Frequency (Hz)	50/60	Mechanical Endurance	20,000	Protection Degree	IP20	Terminal Size (mm²)	1 - 16	Tightening Torque (Nm)	2.5	Operating Temperature °C	-25~ +40°C	Storage Temperature °C	-25~ +70°C		
Specification	MCB																																			
Standard	BS EN 60898-1																																			
Number of Poles	1																																			
Tripping Characteristics	B curve= 3-5In C curve= 5-10In																																			
Tripping Type	Thermal Magnetic																																			
Rated Breaking Capacity (Icu)	6kA																																			
Rated Current (In)	1 - 63A																																			
Rated Voltage (Un/AC)	230V																																			
Residual Current Characteristics																																				
Rated Residual Operating Current (IΔn)																																				
Frequency (Hz)	50/60																																			
Mechanical Endurance	20,000																																			
Protection Degree	IP20																																			
Terminal Size (mm²)	1 - 16																																			
Tightening Torque (Nm)	2.5																																			
Operating Temperature °C	-25~ +40°C																																			
Storage Temperature °C	-25~ +70°C																																			
		DIMENSIONS 																																		
PRODUCT DATA																																				
<table border="1"> <tbody> <tr> <td>PART NUMBER</td> <td>MT06C201</td> </tr> <tr> <td>BARCODE</td> <td>5060523520305</td> </tr> <tr> <td>DESCRIPTION</td> <td>20A C TYPE MCB 6kA 1P</td> </tr> <tr> <td>VOLTAGE</td> <td>230V 50/60Hz</td> </tr> <tr> <td>MAXIMUM LOAD</td> <td>20A</td> </tr> <tr> <td>TERMINAL CAPACITY</td> <td>16mm²</td> </tr> <tr> <td>STANDARD</td> <td>BS EN 60898-1</td> </tr> <tr> <td>MATERIAL</td> <td>PA6 (Nylon 6)</td> </tr> <tr> <td>WEIGHT (1PC) Kg</td> <td>0.12</td> </tr> <tr> <td>INNER CARTON QUANTITY</td> <td>12</td> </tr> <tr> <td>OUTER CARTON QUANTITY</td> <td>120</td> </tr> <tr> <td>ORIGIN OF MANUFACTURE</td> <td>CHINA</td> </tr> </tbody> </table>	PART NUMBER	MT06C201	BARCODE	5060523520305	DESCRIPTION	20A C TYPE MCB 6kA 1P	VOLTAGE	230V 50/60Hz	MAXIMUM LOAD	20A	TERMINAL CAPACITY	16mm²	STANDARD	BS EN 60898-1	MATERIAL	PA6 (Nylon 6)	WEIGHT (1PC) Kg	0.12	INNER CARTON QUANTITY	12	OUTER CARTON QUANTITY	120	ORIGIN OF MANUFACTURE	CHINA												
PART NUMBER	MT06C201																																			
BARCODE	5060523520305																																			
DESCRIPTION	20A C TYPE MCB 6kA 1P																																			
VOLTAGE	230V 50/60Hz																																			
MAXIMUM LOAD	20A																																			
TERMINAL CAPACITY	16mm²																																			
STANDARD	BS EN 60898-1																																			
MATERIAL	PA6 (Nylon 6)																																			
WEIGHT (1PC) Kg	0.12																																			
INNER CARTON QUANTITY	12																																			
OUTER CARTON QUANTITY	120																																			
ORIGIN OF MANUFACTURE	CHINA																																			
		   																																		
		CP (Electric) Ltd Unit 1, Block 8 Moorfield Industrial Estate Kilmarnock KA2 0BA t: 01563 533554 e: sales@cpelectric.co.uk www.cpelectric.co.uk																																		
		Company Number 553729 VAT Number 258 7444 66																																		