

INSTALLATION & MAINTENANCE MANUAL

UCLEDxxx

GENERAL INSTRUCTIONS

These instructions should be read carefully and retained after installation by the end user for future reference and maintenance.

These instructions should be used to aid installation of the following products:

UCLED4CW / UCLED4WW / UCLED7CW / UCLED7WW / UCLED9CW / UCLED9WW / UCLED13CW / UCLED13WW / UCLED18CW / UCLED18WW / UCLED22CW / UCLED22WW

SAFETY


- This product must be installed in accordance with the latest edition of the IEE Wiring Regulations (BS7671) and current Building Regulations. If in any doubt, consult a qualified electrician
- Please isolate mains prior to installation or maintenance
- Check the total load on the circuit (including when this luminaire is fitted) does not exceed the rating of the circuit cable, fuse or circuit breaker
- Please note the IP (Ingress Protection) rating of this product when deciding the location for installation
- This product is for indoor use only
- This product is Class II double insulated
- This product series is IP20 rated

INSTALLATION

Note - If this luminaire is being used in conjunction with an external PIR or sensor, please confirm with the manufacturer of the sensors that they are compatible with LED luminaires.

- Provide power to the required point of installation
- Mark the location of the fixing holes for the mounting clips and drill ensuring not to infringe with any gas / water pipes or electrical cables. The mounting clips should be spaced to distribute the weight of the luminaire evenly. The 4W – 9W units are provided with two mounting clips, the 13W – 22W versions are provided with three (see Fig. 1)

Fig. 1

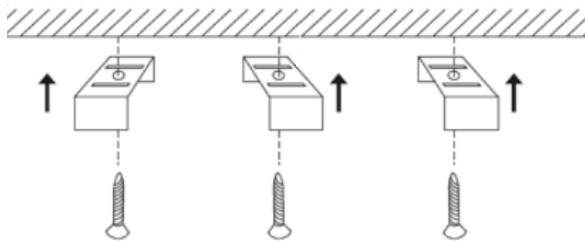

- Fix the mounting clips using suitable screws
- Connect the power cord to the mains supply ensuring the correct polarity is observed: L - Live (brown), N - Neutral (blue), and plug into the luminaire
- Multiple fittings can be linked together using a coupler (included) or link leads (available separately) up to a maximum of 12 fittings
- Switch on and check for correct operation


WARNING

This product must be disconnected from the circuit if subjected to any high voltage or insulation resistance testing. Irreparable damage will occur if this instruction is not followed.

GENERAL

This product contains a light source of energy efficiency class E (UCLED4CW, UCLED7CW, UCLED9CW, UCLED13CW, UCLED18CW, UCLED22CW, UCLED22WW) / F (UCLED4WW, UCLED7WW, UCLED9WW, UCLED13WW, UCLED18WW) to Regulation (EU) No. 2019/2015.

This product contains a non-replaceable LED light source and a non-replaceable control gear.



Clean with a soft dry cloth only, do not use aggressive cleaning products or solvents which may damage the product.

This product is non-dimmable.

This product should be dismantled for disposal when it reaches the end of its life. Please see website for dismantling instructions.

This product should be recycled in the correct manner when it reaches the end of its life. Check local authorities for where facilities exist.

WARRANTY

This product has a warranty of 3 years from date of purchase. Failure to install this product in accordance with the current edition of the IEE Wiring Regulations (BS7671), improper use, or removal of the batch code will invalidate the warranty. If this product should fail within its warranty period, it should be returned to the place of purchase for a free of charge replacement. ML Accessories does not accept responsibility for any installation costs associated with the replacement product. Your statutory rights are not affected. ML Accessories reserve the right to alter product specification without prior notice.

**INTERNATIONAL
CONTACT DETAILS**



**230V
50Hz**

IP20



ML
ACCESSORIES LTD



**UK
CA** **CE**



60

ML Accessories Limited LU5 4LT
www.mlaccessories.co.uk