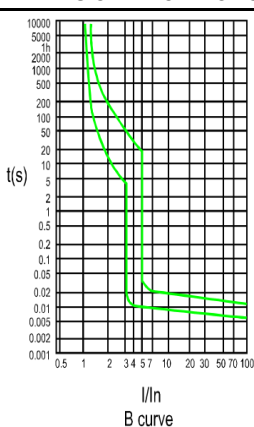

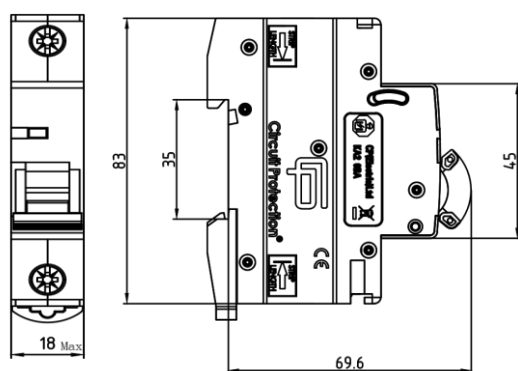


FuseBox®		Barcode  5 060523 520237	
Miniature Circuit Breaker (6kA) MT06B201  Circuit Protection			
TECHNICAL		TRIPPING CHARACTERISTICS	
Specification	MCB		
Standard	BS EN 60898-1		
Number of Poles	1		
Tripping Characteristics	B curve= 3-5In C curve= 5-10In		
Tripping Type	Thermal Magnetic		
Rated Breaking Capacity (Icu)	6kA		
Rated Current (In)	1 - 63A		
Rated Voltage (Un/AC)	230V		
Residual Current Characteristics			
Rated Residual Operating Current (IΔn)			
Frequency (Hz)	50/60		
Mechanical Endurance	20,000		
Protection Degree	IP20		
Terminal Size (mm²)	1 - 16		
Tightening Torque (Nm)	2.5		
Operating Temperature °C	-25~ +40°C		
Storage Temperature °C	-25~ +70°C		
1P MCB 		DIMENSIONS 	
PRODUCT DATA			
PART NUMBER	MT06B201		
BARCODE	5060523520237		
DESCRIPTION	20A B TYPE MCB 6kA 1P		
VOLTAGE	230V 50/60Hz		
MAXIMUM LOAD	20A		
TERMINAL CAPACITY	16mm²		
STANDARD	BS EN 60898-1		
MATERIAL	PA6 (Nylon 6)	RoHS Compliant CE  	
WEIGHT (1PC) Kg	0.12		
INNER CARTON QUANTITY	12		
OUTER CARTON QUANTITY	120		
ORIGIN OF MANUFACTURE	CHINA		
 CP (Electric) Ltd Unit 1, Block 8 Moorfield Industrial Estate Kilmarnock KA2 0BA t: 01563 533554 e: sales@cpelectric.co.uk www.cpelectric.co.uk Company Number 553729 VAT Number 258 7444 66			