



# ENLITE

## MAINS VOLTAGE ROUND AND SQUARE LED DOWNLIGHTS

PLEASE READ THESE INSTRUCTIONS CAREFULLY BEFORE INSTALLATION  
LEAVE A COPY FOR THE USER / MAINTENANCE ENGINEER FOR FUTURE REFERENCE

### IMPORTANT INSTALLATION INFORMATION

- Installation should be carried out in accordance with the latest edition of the National wiring regulations (For Australia please check the latest edition of the Wiring Rules -AS/NZS 3000:2007). If in doubt please consult a qualified electrician.
- Mains supply voltage 220-240V AC
- EN-DL101 is not dimmable
- EN-DDL101 is dimmable from 100 - 20% with most leading or trailing edge dimmers.
- For full dimmer compatibility please see [www.enlite.eu](http://www.enlite.eu)
- These luminaires are for indoor use only.
- Class II, Double Insulated an earth is not required.
- These downlights must be disconnected before insulation resistance testing of the lighting circuit.




This luminaire is not suitable for covering with insulation material .

### INSTALLATION INSTRUCTIONS

Before commencing installation or maintenance, ensure electricity is switched off at the mains.

1. Select the required position for the luminaire ensuring the clearances shown below are observed. Beware of joists, water pipes and electric cables.
2. Cutout for the downlights:  
EN-DL101 & EN-DDL101 – 60mm
3. Connect Mains supply using a suitable junction box:  
Brown – (L) Live  
Blue – (N) Neutral
4. Slide the legs of the mounting spring clips into the ceiling cut-out and push the luminaire up into the aperture. Ensure that it is securely located
5. Switch on the power supply.

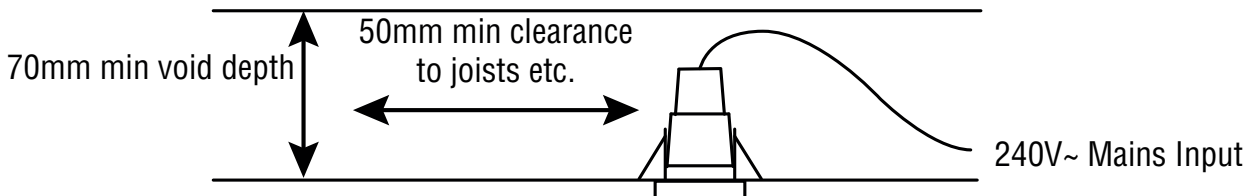

### Environmental Protection (W.E.E.E.) – Enlite’s WEEE Reg.No. WEE/BG0130YX (UK Only)



Waste Electrical & Electronic Equipment Regulations (WEEE) requires that any of our products showing this marking (left) must not be disposed of with other household or commercial waste. Enlite does not levy any WEEE disposal charges to its customers for affected WEEE related products. To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate any such product from other waste types and recycle it responsibly at your local facilities. Check with your Local Authority, Recycling Centre or retailer for recycling advice. If, when you purchased any Enlite product, your supplier included a WEEE disposal fee, you should then contact your supplier for advice on his take back of the product for the correct disposal.

### GUARANTEE

This product is guaranteed for a period of 3 years from the date of purchase. The guarantee is invalid in the case of improper use, installation, tampering, and removal of the Q.C. date label, installation in an improper working environment or installation not according to the current edition of the National Wiring Regulations. Should this product fail during the guarantee period it will be replaced free of charge, subject to correct installation and return of the faulty unit. Enlite does not accept responsibility for any installation costs associated with the replacement of this product. This warranty is in addition to the statutory rights in your country of purchase. Enlite reserves the right to alter specifications without prior notice.

UK	France	UAE	Australia	South Africa
Tel: +44 (0) 1727 83 66 11	Tel: +33 (0) 1 30 11 11 88	Tel: +971 (0) 4 328 5489	Tel: +61 (0) 2 9882 6000	Tel: +27 (0) 11 234 4878
Email: <a href="mailto:uk@enlitelighting.com">uk@enlitelighting.com</a>	Email: <a href="mailto:france@enlitelighting.com">france@enlitelighting.com</a>	Email: <a href="mailto:uae@enlitelighting.com">uae@enlitelighting.com</a>	Email: <a href="mailto:australia@enlitelighting.com">australia@enlitelighting.com</a>	Email: <a href="mailto:SouthAfrica@enlitelighting.com">SouthAfrica@enlitelighting.com</a>