

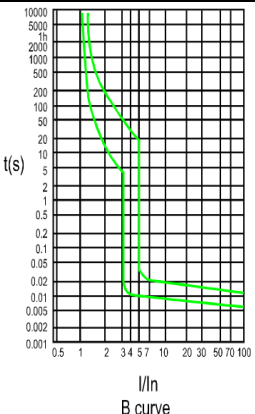

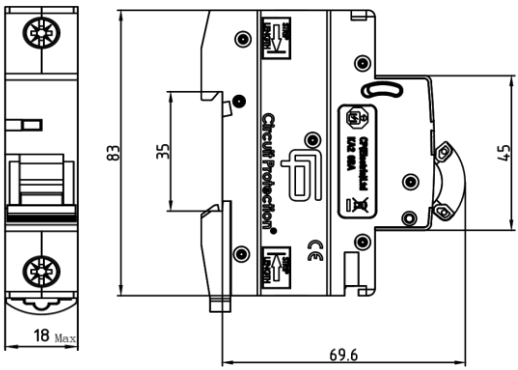



		BARCODE  5 060523 520213	
		Miniature Circuit Breaker (6kA) <b>MT06B101</b> 	
TECHNICAL		TRIPPING CHARACTERISTICS	
Specification	<b>MCB</b>		
<b>Standard</b>	BS EN 60898-1		
<b>Number of Poles</b>	1		
<b>Tripping Characteristics</b>	B curve= 3-5In C curve= 5-10In		
<b>Tripping Type</b>	Thermal Magnetic		
<b>Rated Breaking Capacity (Icu)</b>	6kA		
<b>Rated Current (In)</b>	1 - 63A		
<b>Rated Voltage (Un/AC)</b>	230V		
<b>Residual Current Characteristics</b>			
<b>Rated Residual Operating Current (IΔn)</b>			
<b>Frequency (Hz)</b>	50/60		
<b>Mechanical Endurance</b>	20,000		
<b>Protection Degree</b>	IP20		
<b>Terminal Size (mm<sup>2</sup>)</b>	1 - 16		
<b>Tightening Torque (Nm)</b>	2.5		
<b>Operating Temperature °C</b>	-25~ +40°C		
<b>Storage Temperature °C</b>	-25~ +70°C		
		DIMENSIONS 	
<b>PRODUCT DATA</b>			
<b>PART NUMBER</b>	MT06B101		
<b>BARCODE</b>	5060523520213		
<b>DESCRIPTION</b>	10A B TYPE MCB 6kA 1P		
<b>VOLTAGE</b>	230V 50/60Hz		
<b>MAXIMUM LOAD</b>	6A		
<b>TERMINAL CAPACITY</b>	16mm <sup>2</sup>		
<b>STANDARD</b>	BS EN 60898-1		
<b>MATERIAL</b>	PA6 (Nylon 6)		
<b>WEIGHT (1PC) Kg</b>	0.12		
<b>INNER CARTON QUANTITY</b>	12		
<b>OUTER CARTON QUANTITY</b>	120		
<b>ORIGIN OF MANUFACTURE</b>	CHINA		
		CP (Electric) Ltd   Unit 1, Block 8   Moorfield Industrial Estate   Kilmarnock KA2 0BA t: 01563 533554   e: sales@cpelectric.co.uk   www.cpelectric.co.uk	
		Company Number 553729 VAT Number 258 7444 66	