

VEGAS 384W 4 CHANNEL RECEIVER FOR SINGLE COLOUR, RGB AND RGBW LED FLEXI STRIPS

RVA4CH-REC

PLEASE READ INSTRUCTION BEFORE COMMENCING INSTALLATION AND RETAIN FOR FUTURE REFERENCES.
! Electrical products can cause death or injury, or damage to property. If in any doubt about the installation or use of this product, consult a competent electrician


Note:

Product technical information and specification may change over time without prior notification. For the latest technical information please visit our web site www.robus.com

-20°C < Ta < +40°C,
Output: 12V or 24V DC
Max load/ Channel: 12V:<48W, 24V:<96W
PWM:2KHz

Controller supply voltage: DC12~24V
Connecting Mode: Common anode
Product size: L160*W46*H25 mm
Wireless-sync-control
RF:2.4G

Controller has wireless synchronization function in static mode and dynamic
Distance between controllers must be less than 10m as below




Remote control:

Controllers are supplied with open control, any RVA4Z-RC remote with operate the controllers.
Please pair controller with the remote if zone-setting or unique-control is needed (see instruction manual for RVA4Z-RC).
It is recommended that each area or zone has its own independent power supply or switch to enable pairing and configuration.

Connecting drawing:

Please note Dip-Switch configuration

Circuit 1: Single color (V+→V+, CH: -, CH2: -, CH3: -, CH4: -)

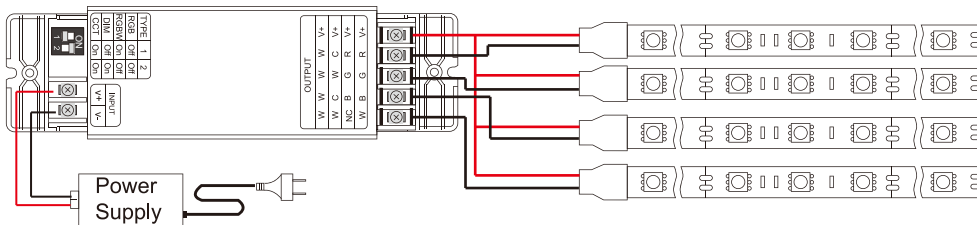

The Installation must be carried out by a qualified electrician

LED Group
Western Retail Park
Nangor Road
Dublin 12 D12 E7VP
Ireland
Issue 1 1211199

Tel: +353 1 7099000
Fax: +353 1 7099060
Email: info@robus.com
Website: www.robus.com




PLEASE READ INSTRUCTION BEFORE COMMENCING INSTALLATION AND RETAIN FOR FUTURE REFERENCES.
! Electrical products can cause death or injury, or damage to property. If in any doubt about the installation or use of this product, consult a competent electrician


Note:

Product technical information and specification may change over time without prior notification. For the latest technical information please visit our web site www.robus.com or robusdirect.com.au


Circuit 2: CW+WW(V+→COMMON, CH1→CW, CH2→WW, CH3→CW, CH4: WW.)

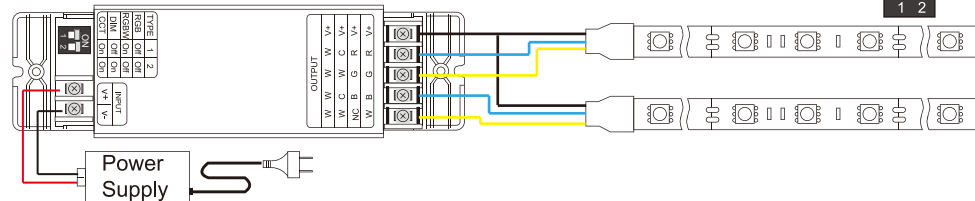

Circuit 3: RGB (V+→V+, CH1→R, CH2→G, CH3→B, CH4: NC.)

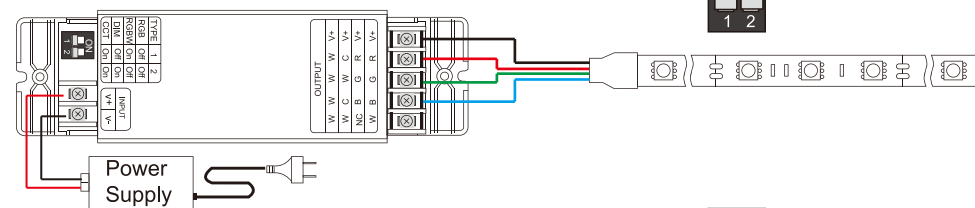

Circuit 4: RGBW (V+→V+, CH1→R, CH2→G, CH3→B, CH4: W.)

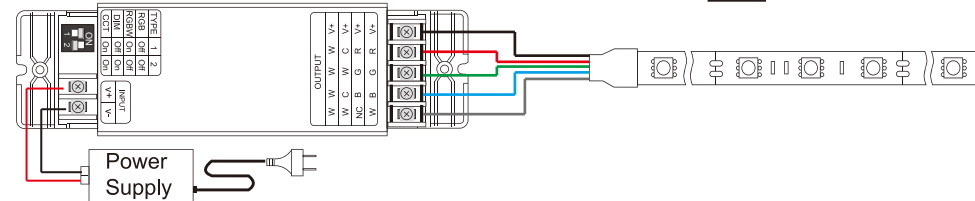

Information for the Product user:

1. Please note the requirement to dispose of Waste Electrical & Electronic Equipment separately from household waste (WEEE marked with crossed out wheeie bin symbol).
2. Please consider your role in contributing to re-use and recycling by returning this product at end of life to a collection centre for waste electrical equipment or a Civic Amenity site, or to a retail outlet from which you are purchasing a replacement.
3. This equipment may contain substances that are hazardous to health and the environment if disposed of carelessly. It is important that it is separated from normal household waste and recycled in the WEEE chain
4. The "crossed out wheeie bin symbol" on a product indicates this equipment must not be disposed of in normal household waste, but should be disposed of according to local WEEE regulations

The Installation must be carried out by a qualified electrician