

Object :  
Installation :  
Project number :  
Date :



# 1 Luminaire data

## 1.1 Ansell Lighting, AELLED/WL/CW (ELITE LED)

### 1.1.1 Data sheet

Manufacturer: Ansell Lighting

**ELITE LED      AELLED/WL/CW**


#### Luminaire data

Luminaire efficiency : 70.8077%  
Luminaire efficacy : 77.33 lm/W  
Classification : A40 ↓99.9% ↑0.1%  
CIE Flux Codes : 52 84 97 100 71  
UGR 4H 8H : 19.3 / 24.2  
Power : 32.962 W  
Luminous flux : 2549.1 lm

#### Equipped with

Quantity : 80  
Designation : ( 4000K 40PCS )  
Colour :  
Luminous flux : 45 lm  
Colour reproduction : 1 B

Dimensions : 270 mm x 140 mm x 36 mm

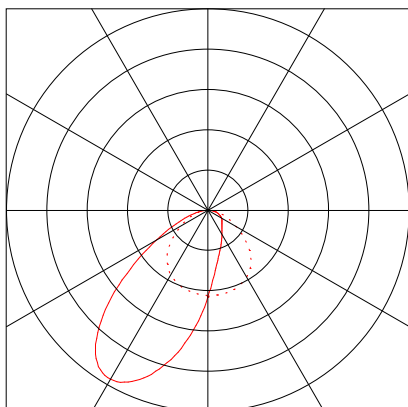


Object :  
 Installation :  
 Project number :  
 Date :



## 1.1 Ansell Lighting, AELLED/WL/CW (ELITE LED)

### 1.1.2 LDC

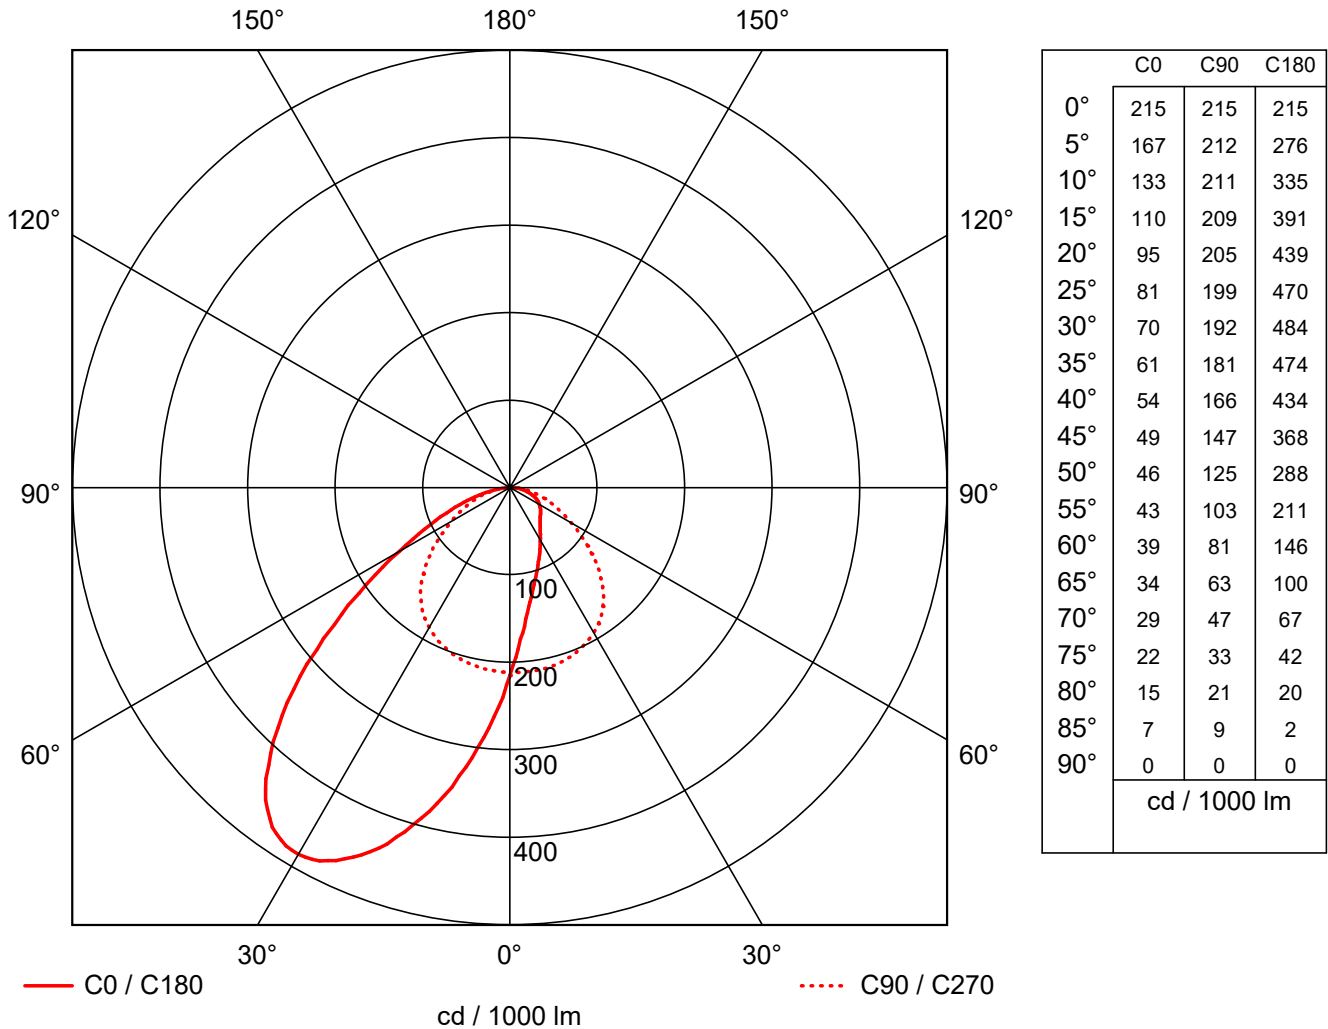

Manufacturer	: Ansell Lighting	Efficiency factor	: 70.81%
Order number	: ELITE LED	Luminaire efficacy	: 77.33 lm/W(A40)
Luminaire name	: AELLED/WL/CW	Light distribution	:
Equipment	: 80 x ( 4000K 40PCS ) / 45 lm	Beam Angle	: -- C0
Dimensions	: L 270 mm x W 140 mm x H 36 mm		: -- C90
File name	: AELLED_WL_CW.Idt		: 52.9° C180
			: -- C270