


SHARK, SIXEIGHT Series

IP68 protection
 Re-enterable
 No expiry date

Suitable for SWA Permanent Submersion

SHARK

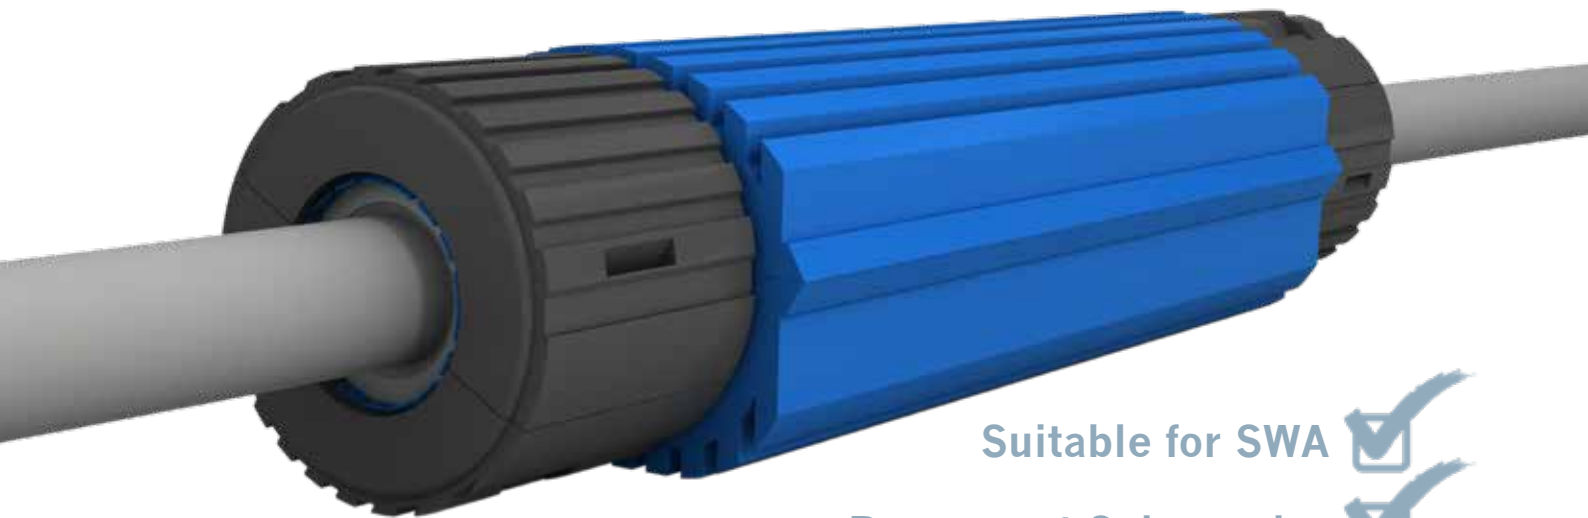


SHARK SIXEIGHT

Protection class	IP68 (up to 10 metres)
Material	Polyamide
Filling	Silicone gel
Temperature range	-20 °C · 90 °C
Glow wire test	Self-extinguishing
Voltage	0.6 kV · 1 kV
Colour	Blue
Included	Terminal block, earth braid and spring coil



SHARK SIXEIGHT Series

SHARK, SIXEIGHT Series

Type	WISKA-No.	Description	Connector Type	 n	Amp	 (mm)	LxBxH innen (mm)	
SHARK 6801 BW	SH6801BW	Pre-filled gel insulated joint	3 pole strip connector	3	32	2.5 - 6	190 x 60 x 48	1
SHARK 6801 DW	SH6801DW	Pre-filled gel insulated joint	5 x crimp connectors	5	41	2.5 - 6	190 x 60 x 48	1
SHARK 6802 AW	SH6802AW	Pre-filled gel insulated joint	5 pole terminal block	5	80	2.5 - 10	235 x 68 x 48	1
SHARK 6803 AW	SH6803AW	Pre-filled gel insulated joint	5 pole terminal block	5	135	10 - 25	310 x 85 x 60	1