




topTER							
Conformity to Standards:	CEI EN 60309-1	IEC 60309-1	Cable entry	16A	2P+E	min: 8	max: 13 mm
	CEI EN 60309-2	IEC 60309-2		32A	3P+E	min: 8.5	max: 14 mm
	CEI EN 60529	IEC 60529			3P+N+E	min: 10	max: 15.5mm
Impact resistance:	>IK 08						
Glow wire test:	850°C insert						
Self extinguishing:	V2						
Temperature resistance:	Operating	-25 to +50°C	Connecting sections of the wires	16A		min: 1	max: 2.5mm ²
	Storage	-30 to +70°C		32A		min: 2.5	max: 6 mm ²

MOULDED IEC 60309 SWITCHED INTERLOCKED SOCKETS - RCD

IP44 Splashproof - topTER




A	V			
16	110	PMRCD16/300SITT ⁽¹⁾		
	230	PMRCD16/301SITT ⁽¹⁾		
	400		PMRCD16/305SITT ⁽²⁾	PMRCD16/308SITT ⁽²⁾
32	110	PMRCD32/300SITT ⁽¹⁾		
	230	PMRCD32/301SITT ⁽¹⁾		
	400		PMRCD32/305SITT ⁽²⁾	PMRCD32/308SITT ⁽²⁾

⁽¹⁾ Includes 30mA-2 pole RCD AC-CLASS

⁽²⁾ Includes 4 pole RCD

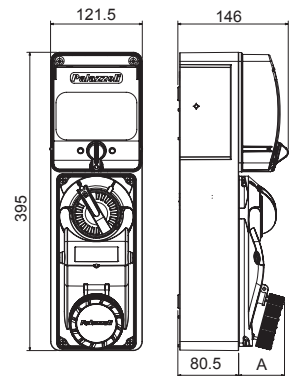


Other mA variants on request



Rated current (A)	Poles	A (mm)	B (mm)	C (mm)
16	2P+E	103	230	66
	3P+E	103	230	69
	3P+N+E	103	230	73
32	2P+E	103	230	81
	3P+E	103	230	81
	3P+N+E	103	230	101

IP66 Watertight - topTER




A	V			
16	110	PMRCD16/400SITT ⁽¹⁾		
	230	PMRCD16/401SITT ⁽¹⁾		
	400		PMRCD16/405SITT ⁽²⁾	PMRCD16/408SITT ⁽²⁾
32	110	PMRCD32/400SITT ⁽¹⁾		
	230	PMRCD32/401SITT ⁽¹⁾		
	400		PMRCD32/405SITT ⁽²⁾	PMRCD32/408SITT ⁽²⁾

⁽¹⁾ Includes 30mA-2 pole RCD AC-CLASS

⁽²⁾ Includes 4 pole RCD

Other mA variants on request

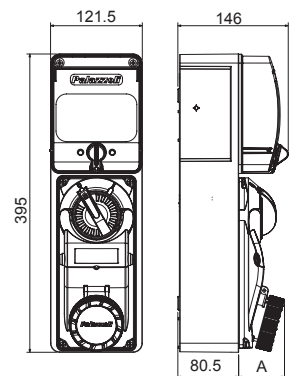

Rated current (A)	Poles	A (mm)	B (mm)	C (mm)
16	2P+E	103	230	66
	3P+E	103	230	69
	3P+N+E	103	230	73
32	2P+E	103	230	81
	3P+E	103	230	81
	3P+N+E	103	230	101