


	Miniature Circuit Breaker 6kA 1 pole C CURVE								
RATING (A)	6	10	16	20	25	32	40	50	63
PART NUMBER	MT06C061	MT06C101	MT06C161	MT06C201	MT06C251	MT06C321	MT06C401	MT06C501	MT06C631
GTIN-13	5060523520275	5060523520282	5060523520299	5060523520305	5060523524525	5060523520312	5060523520329	5060523520336	5060523524532
STANDARD	IEC/EN 60898-1								
NUMBER OF POLES	1								
RATED VOLTAGE (Un/AC)	230V								
FREQUENCY (Hz)	50/60								
RATED BREAKING CAPACITY (Icu)	6000A (6kA)								
RATED CURRENT (In)	6, 10, 16, 20, 25, 32, 40, 50, 63								
TRIPPING CHARACTERISTICS	C CURVE : 5-10In								
MECHANICAL ENDURANCE	10,000								
PROTECTION DEGREE (IP)	20								
MAXIMUM TERMINAL CAPACITY	16mm <sup>2</sup>								
RECOMMENDED TIGHTENING TORQUE (Nm)	2.5								
TRIPPING TYPE	Thermal magnetic								
MOUNTING	35mm din rail								
MATERIAL	PA6 (Nylon 6)								
WEIGHT (1PC) Kg	0.12								
INNER CARTON QUANTITY	12								
OUTER CARTON QUANTITY	120								
ORIGIN OF MANUFACTURE	CHINA								



DIMENSIONS

1 POLE

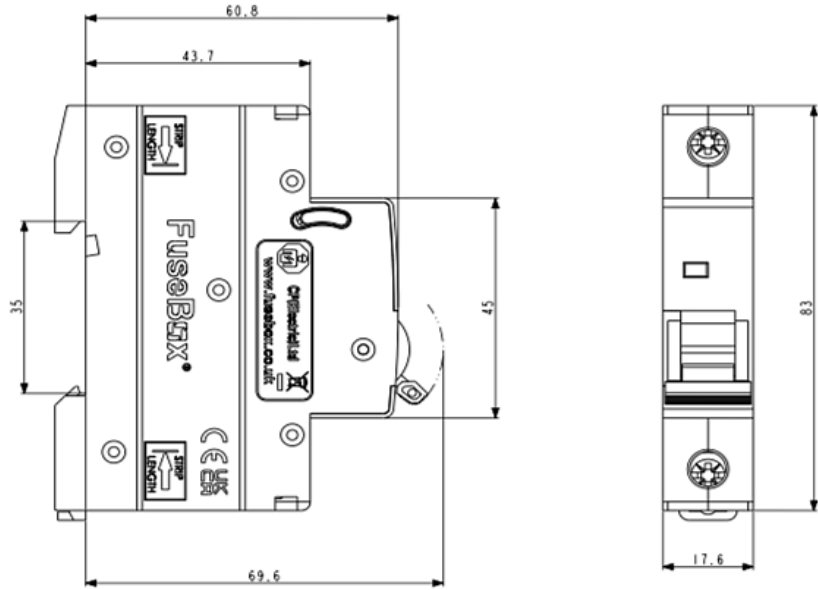

TRIPPING CHARACTERISTICS

C curve 5-10In

Curve C

