




Fitting with proven long term reliability and performance – range now includes ISO fitting and Self-Test option.

Download IES File from website

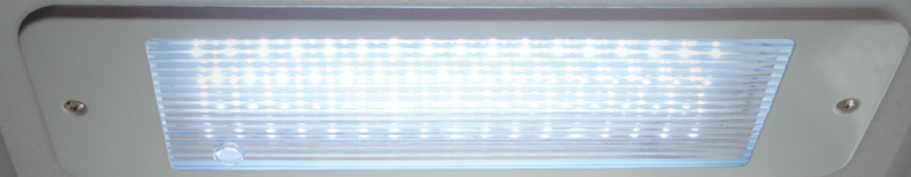

LEDREM3



LEDREM3



SELMDDEM3

## LED MAINTAINED RECESSED EMERGENCY FITTINGS

### Low energy alternative to standard emergency exit fittings

- Pressed steel body • Hole cut out size: 115mm x 320mm
- Hinged gear tray: easy installation and maintenance
- Fitting 5 year warranty, battery 1 year warranty

#### LEDREM3

- Polycarbonate reeded diffuser: unobtrusive solution for discreet emergency lighting
- Facility for non-maintained mode • Facility for remote switching
- Replacement battery code: EB4

#### LEDMDDEM3/LMDDEM3ISO/SELMDDEM3

- Slotted pressed steel panel housing polycarbonate exit legend for unobtrusive exit path designation (see table for legends)
- Viewing distance 30m
- Replacement battery code: EB9

#### SELMDDEM3

- Automatic testing in accordance with EN 62034

- **LEDREM3** = M.O.M: 1 / O.P.Q: 10
- **LEDMDDEM3/LMDDEM3ISO/SELMDDEM3** = M.O.M: 1 / O.P.Q: 26
- **RLGDLR / RLGDUP** = M.O.M: 1 / O.P.Q: 25
- **ISO LEGENDS** = M.O.M: 1 / O.P.Q: 100



**PERFECT FOR OFFICE & COMMERCIAL APPLICATIONS**



Signs Directive



ISO 7010

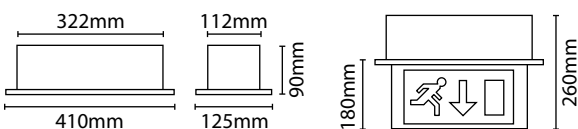

Code	Version	Colour	Wattage	Colour Temp.	Lumens	Avg. Rated Life (Hrs)
LEDREM3	Reeded Diffuser	White	5.20W	6500K	162 lm	18,000 hrs
LEDMDDEM3	Edge Lit Panel & Diffuser With Signs Directive Down Arrow Legend		3.5W		-	
LMDDEM3ISO	Edge Lit Panel & Diffuser With ISO 7010 Up Arrow Legend				-	
SELMDDEM3	Self Test Edge Lit Panel & Diffuser With ISO 7010 Up Arrow Legend		-			
RLGDLR	Signs Directive Left/Right Arrow Legend					
RLGDUP	Signs Directive Up Arrow Legend					
ISOMDDL	ISO 7010 Left/Right Arrow Legend					
ISOMDDD	ISO 7010 Down Arrow Legend					