

Up to 107 lm/W

Unique convertible design for use in shallow ceiling voids



AIR leakage (excluding adjustable)

Fire Rated Downlights



Floating earth termination for earth continuity
Push fit Loop in/Loop out terminals




Convertible design for shallow ceiling voids



Comes with FastRFix™ connector for fast installation



Twist&Lock™
Fixed IP Rated Bezels

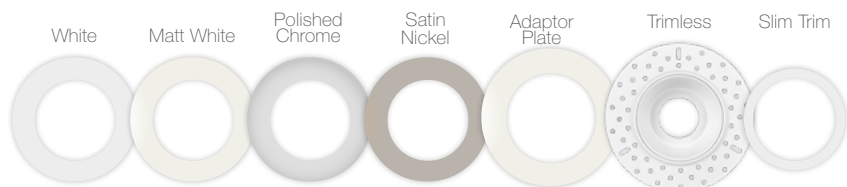

5 Year Warranty

L70 40,000hrs

Triac dimmable as standard

Emergency option

White, Matt White, Polished
Chrome & Satin Nickel bezel
finish options

White slimtrim bezel finish
option


Black or White trimless bezel
finish options




Triac Inline Dimmer
See pg.41





Smart Rotary Dimmer
See pg.35



AU-MPRO1A



AU-MPRO5A

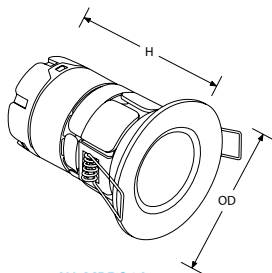

- AU-MPRO1A**
(H) 100mm Height
(OD) 88mm Overall (Ø)
- AU-MPRO2A**
(H) 100mm Height
(OD) 98mm Overall (Ø)
- AU-MPRO5A**
(H) 120mm Height
(OD) 88mm Overall (Ø)

mPRO™

LED Fixed/Adjustable/Baffle Fire Rated Downlights

make smart with



See pg.256-258 for compatibility table

LEDchroic™ lens provides halogen appearance with LED efficiency, anti-glare and precise beam control

Unique convertible design to fit ceiling voids as shallow as 46mm

Delivering up to 107lm/W

Interchangeable IP65 bezels for fixed version providing a sleek finish

IP65 rated for adjustable and baffle option

FastRFix™ rapid install system connector included

60° beam angle for uniform light distribution

Tested in 30, 60 and 90 minute solid timber joist fire rated ceilings††



Fixed IP65



Adjustable IP65



Fixed Baffle IP65



AIR leakage
(excluding adjustable)

Cat. No.	Watts	Colour	Lumens	lm/W	Beam	Cutout [Ø]
mPRO™ Triac Dimmable Fixed (IP65 when used with IP65 Bezel)						
AU-MPRO1A/27	6W	2700K	560lm	93	60°	70mm
AU-MPRO1A/30	6W	3000K	600lm	100	60°	70mm
AU-MPRO1A/40	6W	4000K	640lm	107	60°	70mm
mPRO™ Triac Dimmable IP65 Adjustable						
AU-MPRO2A*/30	6W	3000K	610lm	102	60°	85mm
AU-MPRO2A*/40	6W	4000K	640lm	107	60°	85mm
mPRO™ Triac Dimmable IP65 Baffle (suitable for 30 & 60 minute ceilings)						
AU-MPRO5A/30	6W	3000K	480lm	80	60°	72mm
AU-MPRO5A/40	6W	4000K	500lm	83	60°	72mm

Bezel Options

- [AU-BZ600†](#) mPro™ Fixed IP65 Aluminium Downlight Bezel
- [AU-AP600*](#) mPro™ Fixed Fire Rated Aluminium Adaptor Plate
- [AU-BZ605W](#) mPro™ Fixed Slimtrim Aluminium Baffle Bezel
- [AU-MPROTL**](#) mPro™ Fixed Trimless Aluminium Bezel

†Add suffix **W**, **MW**, **PC**, **SN** or **BLK** for White, Matt White, Polished Chrome, Satin Nickel or Black finishes.

*Add suffix **W**, **MW**, **PC** or **SN** for White, Matt White, Polished Chrome or Satin Nickel finishes.

Add suffix **W or **BLK** for White or Black finishes.

3 hour Emergency pack AU-FRLM10EM available.

††Suitable for use in 30 minute i-joist fire rated ceilings. See pg.262



Fire Rated Downlights