3 Year Warranty

L70 35,000hrs

White finish

make smart with
Aone control
works with
.control

On/Off Relay
See pg.47   A 16 A

EN-BLP6060

BackLite™

LED Backlit Flat Panels 600 x 600mm

make smart with
Aone control
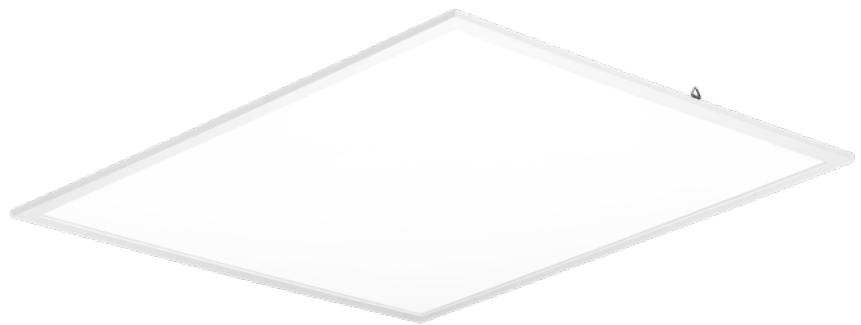See pg.256-258 for compatibility table

Flicker free driver

Delivering 100lm/W

No light guide, removing the risk of yellowing

Life not affected by frequent switching e.g. when used with occupancy controls

Suitable for installation in 15 & 24mm T-bar ceilings

Power Factor >0.9

TP(b) RATED

33mm

Super slim profile

LED Panels

NEW

Cat. No.	Type	Watts	Colour	Lumens	lm/W	Beam
600 x 600mm						
EN-BLP6060/40	Non-Dim	36W	4000K	3600lm	100	110°
EN-BLP6060/50	Non-Dim	36W	5000K	3600lm	100	110°
Accessories						
EN-LPEM2	3 Hour Emergency Pack for Panel Range					

Surface Mount box available. See page 133.

CRI 80   L2 Conservation of Fuel and Power compliant

EN-BLP6060

(L) 595mm Length
(W) 595mm Width
(H) 33mm Height