

5 Year Warranty

L70 50,000hrs

1-10V & DALI dimmable options

Emergency option

White finish




1-10V Inline Dimmer
See pg.45





On/Off Relay
See pg.47



EN-FPRO6060B



EN-FPRO1260B



EN-FPRO6060B

(L) 595mm Length
(W) 595mm Width
(H) 10mm Height

EN-FPRO1260B

(L) 1195mm Length
(W) 595mm Width
(H) 10mm Height

EN-FPRO1230B

(L) 1195mm Length
(W) 295mm Width
(H) 10mm Height

EdgeLiteTM PRO


LED Edge-Lit Flat Panels

make smart with



See pg.256-258 for compatibility table

Over 60% energy savings compared to traditional fluorescent
Edge-lit panel for complete uniformity across diffuser
High quality light guide designed to prevent yellowing
Delivering 110lm/W
SDCM <4 providing consistent light colour quality
UGR19 (Unified Glare Rating)
IP44 rated from the front
Suitable for installation in 15 & 24mm T-bar ceilings

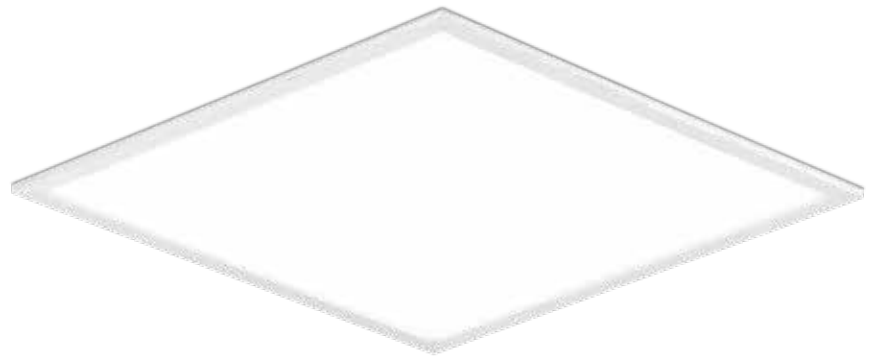

LED Panels



Cat. No.	Type	Watts	Colour	Lumens	lm/W	Beam
600 x 600mm						
EN-FPRO6060B*/40 [†]	Non-Dim	30W	4000K	3300lm	110	110°
EN-FPRO6060B*/50 [†]	Non-Dim	30W	5000K	3300lm	110	110°
1200 x 600mm						
EN-FPRO1260B*/40 [†]	Non-Dim	50W	4000K	5500lm	110	110°
EN-FPRO1260B*/50 [†]	Non-Dim	50W	5000K	5500lm	110	110°
1200 x 300mm						
EN-FPRO1230B*/40 [†]	Non-Dim	30W	4000K	3300lm	110	110°
EN-FPRO1230B*/50 [†]	Non-Dim	30W	5000K	3300lm	110	110°

Accessories

EN-LPEM2

3 Hour Emergency Pack for Panel Range

*Add suffix **DA** for DALI or **V** for 1-10V dimmable option

Surface Mount box, **Adjustable Suspension** kit & **Ceiling Recess Mounts** available. See page 133.

[†]For **DALI Emergency** - the **EM** side will not report back



FPRO6060
FPRO1230