

# EdgeLite™

LED Edge-Lit Flat Panels

make smart with



See pg.256-258 for compatibility table

Over 60% energy savings compared to traditional fluorescent


Edge-lit panel for complete uniformity across diffuser

High quality light guide designed to prevent yellowing

Delivering up to 110lm/W

UGR19 (Unified Glare Rating)

Suitable for installation in 15 & 24mm T-bar ceilings

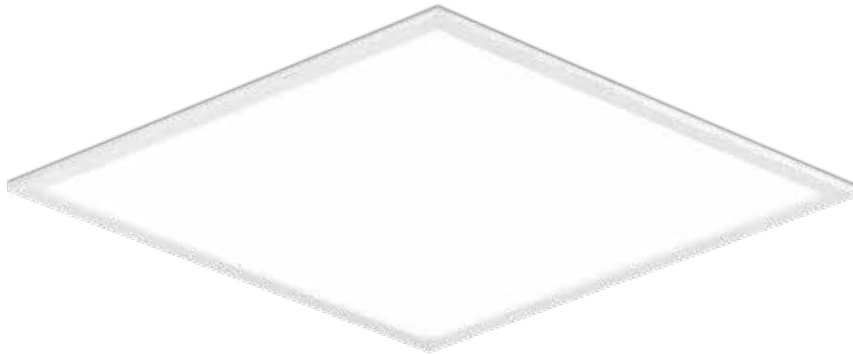

LED Panels

3 Years Warranty

L70 30,000hrs

1-10V & DALI dimmable options

Emergency option

White finish

make smart with



works with

.control




1-10V Inline Dimmer  
See pg.45




On/Off Relay  
See pg.47

EN-FP6060C



EN-FP1260C



Cat. No.	Type	Watts	Colour	Lumens	lm/W	Beam
<b>600 x 600mm</b>						
EN-FP6060C*/40†	Non-Dim	36W	4000K	3400lm	95	110°
EN-FP6060C*/50†	Non-Dim	36W	5000K	3400lm	95	110°
<b>1200 x 600mm</b>						
EN-FP1260C*/40†	Non-Dim	50W	4000K	5500lm	110	110°
EN-FP1260C*/50†	Non-Dim	50W	5000K	5500lm	110	110°
<b>1200 x 300mm</b>						
EN-FP1230C*/40†	Non-Dim	36W	4000K	3400lm	95	110°
EN-FP1230C*/50†	Non-Dim	36W	5000K	3400lm	95	110°


**Accessories**

EN-LPEM2 3 Hour Emergency Pack for Panel Range

\*Add suffix **DA** for DALI or **V** for 1-10V dimmable option

Surface Mount box, Adjustable Suspension kit & Ceiling Recess Mounts available. See page 133.

†For DALI Emergency - the EM side will not report back



EN-FP6060C

(L) 595mm Length  
(W) 595mm Width  
(H) 10mm Height

EN-FP1260C

(L) 1195mm Length  
(W) 595mm Width  
(H) 10mm Height

EN-FP1230C

(L) 1195mm Length  
(W) 295mm Width  
(H) 10mm Height