

3 Year Warranty

L70 25,000hrs

Microwave sensing option

Emergency option



Black or White finish options



On/Off Relay
See pg.47



EN-BH18S

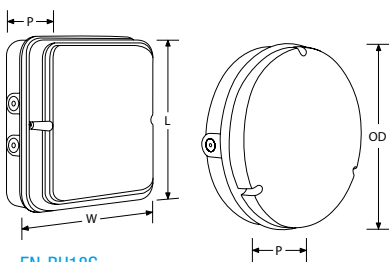

EN-BH18S

(L) 255mm Length
(W) 255mm Width
(P) 95mm Projection

EN-BH18R

(OD) 285mm Overall Ø
(P) 86mm Projection

UtiliteDrum™

IP65 LED Bulkheads

make smart with



See pg.256-258 for compatibility table

Polycarbonate body and diffuser

20mm conduit side entries

IP65 rated

IK10 rated impact resistance

Adjustable hold time 5 seconds to 30 minutes for microwave option


Adjustable light detector from 2-50 lux for microwave option



Square



Round



Microwave version
detection range

Cat. No.	Watts	Colour	Lumens	lm/W	Shape
Non-Dimmable					
EN-BH18S*/40	18W	4000K	1300lm	72	Square
EN-BH18S*/40MS	18W	4000K	1300lm	72	Square
EN-BH18S*/40EM	20W	4000K	1300lm	65	Square
EN-BH18R*/40	18W	4000K	1300lm	72	Round
EN-BH18R*/40MS	18W	4000K	1300lm	72	Round
EN-BH18R*/40EM	20W	4000K	1300lm	65	Round

*Add suffix **W** or **BLK** for White or Black finish

