

## Toggle with ICWLG3 Gripper

### Wire Rope crimped with end stopper & toggle

**Function:**  
Recommended for the suspension of HVAC, electrical and mechanical services.

**Applications:**  
Suitable for profile roof cladding, light fittings, luminaries and other cavities.

**Technical Data:**

- SMACNA compliance- all products carry a 5:1 safety factor
- As per UL 1598, CSA C22.2 No.250.0-08
- Tested & Certified by TUV Nord.

**Material Specification:**

**Toggle** MS White Zinc  
**End Stopper** MS Zn Trivalent  
**Wire rope** Ms Zn Trivalent IS228, (ASTM-D117)  
 -2016, IS-6745-2011

**Max Load** 280kg  
**SWL** 56kg  
**Safety Factor** 5:1



ICWST3  
ICWST5

Code	Size	Price Each
ICWST3	7 x 7 Strand 2mm (3 metres)	
ICWST5	7 x 7 Strand 2mm (5 metres)	

## Stud with ICWLG3 Gripper

### Wire Rope crimped with M8 stud

**Function:**  
Recommended for the suspension of HVAC, electrical and mechanical services. (For indoor & stationary setting).

**Applications:**  
Concrete ceilings, metal decking and pressed metal brackets (with nuts).

**Technical Data:**


- SMACNA compliance- all products carry a 5:1 safety factor
- Tested & Certified by TUV Nord.
- As per UL 1598, CSA C22.2 No.250.0-08

**Material Specification:**

**Stud** MS-En1A White Zinc  
 MS Galvanized IS228, (ASTM-D117)  
**Wire rope** -2016, IS-6745-2011

**Max Load** 280kg  
**SWL** 56kg  
**Safety Factor** 5:1

Comes complete with drop-in anchor.  
Also compatible with Wedge Nuts and Channel Nuts



ICWSS3  
ICWSS5

Code	Size	Price Each
ICWSS3	7 x 7 Strand 2mm (3 metres)	
ICWSS5	7 x 7 Strand 2mm (5 metres)	

## Loop Wire with ICWLG3 Gripper

### Wire Rope crimped with pre-formed loop.


**Function:**  
Recommended for the suspension of HVAC, electrical and mechanical services.

**Applications:**  
Purlins, beams, roof trusses and other accessible building features.

**Material Specification:**

**Ferrule** MS-En8D White Zinc (Hexagonal Crimped)  
**Wire rope** Ms Galvanised IS228, (ASTM-D117)-2016, IS-6745-2011

**Max Load** 280kg  
**SWL** 56kg  
**Safety Factor** 5:1



ICWLS3  
ICWLS5

Code	Size	Price Each
ICWLS3	7 x 7 Strand 2mm (3 metres)	
ICWLS5	7 x 7 Strand 2mm (5 metres)	

## Snap Hook 'Y' with ICWLG3 Gripper

### Wire Rope crimped Snap Hooks.

**Function:**  
Recommended for the suspension of HVAC, electrical and mechanical services.

**Applications:**  
Suitable for use on cable trays etc.

**Technical Data:**

- SMACNA compliance - all products carry a 5:1 Safety Factor
- As per UL 1598, CSA C22.2 No.250.0-08
- Tested & Certified by TUV Nord.

**Material Specification:**

**Hook** MS-En8D White Zinc  
 MS Galvanised IS228, (ASTM-D117)  
**Wire Rope** -2016, IS-6745-2011

**Crimping** Hexagonal  
**Max Load** 280kg  
**SWL** 56kg  
**Safety Factor** 5:1



ICWSY3  
ICWSY5

Code	Size	Price Each
ICWSY3	7 x 7 Strand 2mm (3 metres)	
ICWSY5	7 x 7 Strand 2mm (5 metres)	

# Wire Suspension Systems

## Wide range of Wire & Accessories

- Cost Effective and Time Saving Solution over Threaded Rod
- Versatile Range to suit multiple applications including HVAC, Electrical, Engineering & more!
- Our Wire Suspension Systems are tested & certified by TUV Nord



## Blank Price List



## Contact Us

**Email:** sales@deligo.co.uk  
**Phone:** 01384 824 100  
**Fax:** 01384 825 077  
**WhatsApp:** 07535097873

### Can't find what you're looking for?

For more information on our products please contact our sales team on:

**Email:** sales@deligo.co.uk  
**Phone:** 01384 824 100  
**Fax:** 01384 825 077  
**WhatsApp:** 07535097873



Make sure to check out our Catalogue for more information on our range of products

# NEW Industrial Accessories | Catenary Wire & Accessories

# NEW Industrial Accessories | Wire Suspension Systems

## NEW Stainless Steel Catenary Wire Kit 30 Metres

Code	Size	Price Each
ICWSSKIT	30 Metre Stainless Steel Catenary Wire Kit	

**Includes:**  
1 of each ICWSS30, ICWSSS & ICWSSR  
**Material:** Stainless Steel A2 (304)



## Catenary Wire Kit 30 Metres

Code	Size	Price Each
ICWKIT	30 Metre Kit & Accessories	

**Includes:**  
1 of each ICW30, ICWS, ICWR and ICWH  
10 of each ICWE & ICWG



## NEW Stainless Steel Individual Accessories

Code	Size	Price Each
ICWSSE	Eyelet for Catenary Wire	
ICWSSG	Wire Rope Grip	
ICWSSH	Hook Plate for Catenary Wire	
ICWSSR	Ring Plate for Catenary Wire	
ICWSSS	4" Strainer (Tensioner)	



## Individual Accessories

Code	Size	Price Each
ICWC	Carabiner Hook	
ICWE	Eyelet for Catenary Wire	
ICWG	Wire Rope Grip	
ICWH	Hook Plate for Catenary Wire	
ICWR	Ring Plate for Catenary Wire	
ICWS	4" Strainer (Tensioner)	



## NEW Stainless Steel Catenary Wire

Code	Size	Price Each
ICWSS30	30 Metre Stainless Steel Catenary Wire	
ICWSS50	50 Metre Stainless Steel Catenary Wire	
ICWSS100	100 Metre Stainless Steel Catenary Wire	

Our range of Catenary Wire & Accessories, excluding the Carabiner Hook (ICWC), now in Stainless Steel.  
**Material:** Stainless Steel A2 (304)



## Catenary Wire Steel

Code	Size	Price Each
ICW30	3mm x 30m Coil	
ICW50	3mm x 50m Coil	
ICW100	3mm x 100m Drum	
NEW ICW2100	2mm x 100m Drum	

**Material:** Steel  
**Finish:** Galv  
**Strand:** 7



## Wire Hanger ZY

Code	Size	Length (b)	Price 100
IWH660	M6 x 60	60mm	

**Material:** Steel  
**Usage:** Medium duty installation, expansion type  
**Application:** Suspended ceilings, catenary / suspension wire  
**Substrate Applicable:** Concrete, stone and solid brickwork



## Why choose HangTyte?

HangTyte™ products are durable, cost-effective and are a more versatile alternative to other leading brands.

	HangTyte™	Zip Rize	Gripper 1 (Standard)	Gripper 2 (Standard)
Quick to Install	✓	✓	X	✓
Key/Toolless Operation	✓	✓	X	✓
TUV Nord Certified	✓	✓	✓	✓
SWL (Base on 2mm Wire)	56kg	50kg	45kg	45kg

**HangTyte™**  
Wire Suspension System

## Gripper

### Cable Blocker/Gripper

**Function:**  
Recommended for the suspension of HVAC, electrical and mechanical services (For indoor & stationary setting).


**Applications:**  
Suitable for locking wire rope to insure desired safe working loads.

**Technical Data:**

- SMANCA compliance - all products carry a 5:1 Safety Factor
- As per UL 1598, CSA C22.2 No.250.0-08
- Tested & Certified by TUV Nord.

### Material Specification:

**Housing** Type ZA2 Zinc  
**Locking Mechanism** Ball Bearing  
**Release Mechanism** Inbuilt release key  
**Spring** Stainless Steel  
**Additional Safety Lock** Brass  
**Max Load** 565kg  
**SWL** 113kg  
**Safety Factor** 5:1

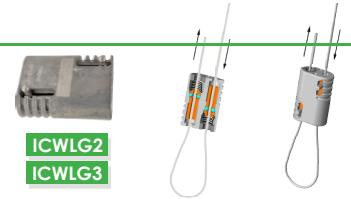

Code	Description	Price Each
NEW ICWL2	1.5mm - 2.0mm	
ICWL3	2.4mm - 3.2mm	

## Looped Anchor with ICWL3 Gripper

### Wire Rope crimped masonry anchor.

**Function:**  
Recommended for suspension of HVAC, Electrical and Mechanical services (For indoor setting)


**Applications:**  
Concrete ceilings and cracked concrete ceilings

**Technical Data:**

- SMACNA compliance- all products carry a 5:1 safety factor
- As per UL 1598, CSA C22.2 No.250.0-08
- Tested & Certified by TUV Nord.

### Material Specification:

**MS-En1A** with White Zinc  
**Max Load** 280kg  
**SWL** 56kg  
**Safety Factor** 5:1

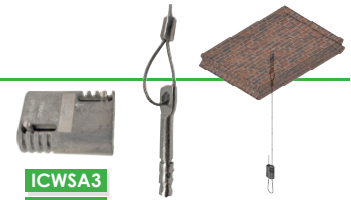

Code	Description	Price Each
ICWSA3	7 x 7 Strand 2mm (3 metres)	
ICWSA5	7 x 7 Strand 2mm (5 metres)	

Code	Description	Price Each
ICWSA3	7 x 7 Strand 2mm (3 metres)	
ICWSA5	7 x 7 Strand 2mm (5 metres)	

## Snaphook with ICWL3 Gripper

### Wire Rope crimped with snaphook.

**Function:**  
Recommended for the suspension of HVAC, electrical and mechanical services.


**Applications:**  
Suitable for use on cable trays etc.

**Technical Data:**

- SMACNA compliance- all products carry a 5:1 safety factor
- As per UL 1598, CSA C22.2 No.250.0-08
- Tested & Certified by TUV Nord.

### Material Specification:

**Hook** MS-En8D White Zinc  
**Wire rope** MS Galvanized IS228, (ASTM-D117)  
-2016, IS-6745-2011 Hexagonal  
**Max Load** 280kg  
**SWL** 56kg  
**Safety Factor** 5:1

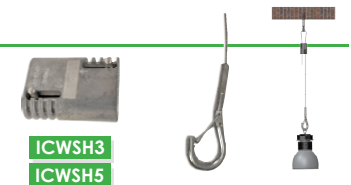

Code	Size	Price Each
ICWSH3	7 x 7 Strand 2mm (3 metres)	
ICWSH5	7 x 7 Strand 2mm (5 metres)	