






wall mounting – light duty
UC50





■ **UC50 – support cradles**

Use as a support cradle for 50 mm wide steel wire cable tray in 30 mm or 54 mm depths
 Can be mounted directly onto the wall - horizontally or vertically, or onto wall mounted cantilever arms using fasteners (see below for assembly information)
 Can also be ceiling mounted in conjunction with CEQ (see p. 67) or floor mounted (see p. 80). Supplied singly without fasteners

■ **Installation**

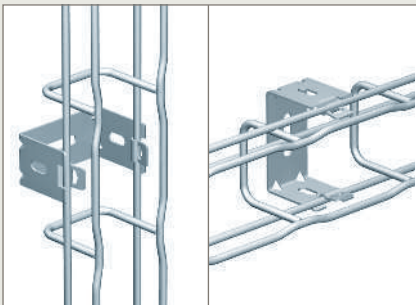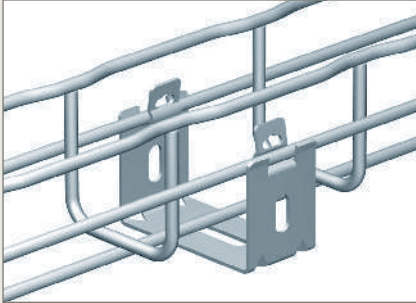


Mount directly onto wall using fasteners (not supplied)

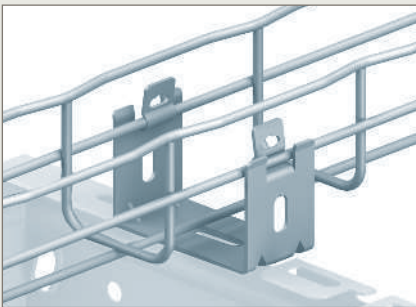

Mount onto wall mounted cantilever arms using fasteners (not supplied)

■ **Assembly**



Securing UC50 to steel wire cable tray

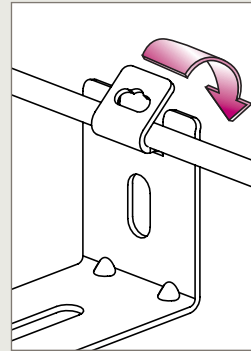

Fast assembling




Fixing without nuts and bolts



Bend tabs with screwdriver to secure to steel wire cable tray


Securing UC50 to cantilever arm



Use BTRCC 6 x 20 (see p. 35) to secure to cantilever arms

■ **Dimensions and weights**

↕ 30 → 54 mm ↔ 50 mm



Cat. Nos.	↓ daN	Weight (kg)			
		GS	GC	304L	316L
UC50	12	0-06	0-07	0-06	0-06

Please use Cat. No. when placing your order, see p. 20

All weights are given in Kilograms (kg)

Key :

GS Pre-galvanised	304L Stainless steel 304L
GC Hot dip galvanised after manufacture	316L Stainless steel 316L

For detailed information related to finishes, refer to p. 116-117


All dimensions (mm) are nominal

→ For ceiling mounting : see p. 67

→ For cantilever arms : see p. 56-62

wall mounting – light duty


CAT30




■ CAT30 – cantilever arm / wall fixing plates

Use to fix 50 mm wide steel wire cable tray in 30 mm or 54 mm depths directly onto the wall or onto wall mounted cantilever arms using fasteners (see below for assembly information)
Supplied singly without fasteners

■ Installation




Mount directly onto the wall using fasteners (not supplied)



Mount onto wall mounting cantilever arms using fasteners (not supplied)

■ Assembly

Securing CAT30 to steel wire cable tray

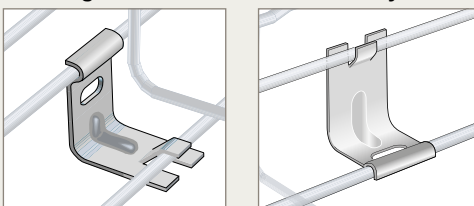


Click to secure to steel wire cable tray



Fixing without nuts and bolts

Securing CAT30 to cantilever arms



Use BTRCC 6 x 20 (see p. 35) to secure to cantilever arms

■ Dimensions and weights

↓ 30 → 54 mm ← 50 mm



Cat. Nos.	↓ daN	Weight (kg)			
		GS	DC	304L	316L
CAT30	20	0.03	0.03	0.03	0.03

Please use Cat. No. when placing your order, see p. 20

All weights are given in Kilograms (kg)

Key :


GS Pre-galvanised	304L Stainless steel 304L
GC Hot dip galvanised after manufacture	316L Stainless steel 316L

For detailed information related to finishes, refer to p. 116-117

All dimensions (mm) are nominal

→ For cantilever arms : see p. 56-62



wall mounting – light duty
CAT40





■ **CAT40 – channel / wall fixing plates**

Use to fix 50 mm wide steel wire cable tray in 30 mm or 54 mm depths directly onto the wall or onto wall mounted channel support. Attach to wall or channel support using fasteners (see below for assembly information). Can also be clipped onto most steel wire cable trays as an ancillary mounting plate (see p. 87). Supplied singly without fasteners.

■ **Installation**

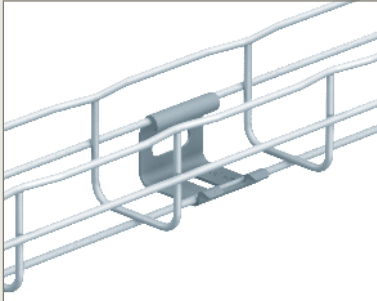


Mount directly onto wall using fasteners (not supplied)

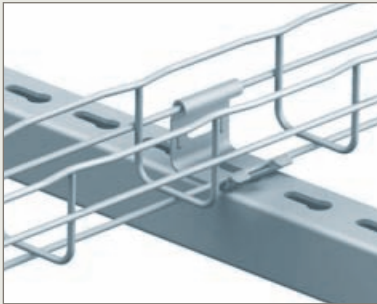

Mount onto wall mounted channel support using fasteners (not supplied)

■ **Assembly**

Securing CAT40 to steel wire cable tray

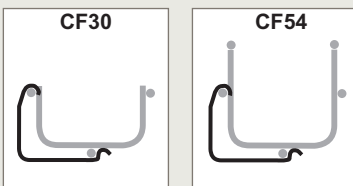


Click to secure to steel wire cable tray



Fixing without nuts and bolts


Securing CAT40 to channel support



Use BTRCC 6 x 20 (see p. 35) to secure to channel support

■ **Dimensions and weights**

↕ 30 → 54 mm ↔ 50 mm



Cat. Nos.	↓ F daN	Weight (kg)			
		GS	DC	316L	304L
CAT40	20	0.04	0.04	0.04	0.04

Please use Cat. No. when placing your order, see p. 20

All weights are given in Kilograms (kg)


Key :	GS Pre-galvanised	304L Stainless steel 304L
	DC Geomet	316L Stainless steel 316L

For detailed information related to finishes, refer to **p. 116-117**

All dimensions (mm) are nominal

wall mounting – medium duty


CM50 – CM50XL

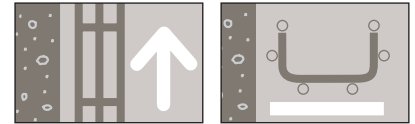

■ CM50 – universal mounting plates (small)

Use to fix 50 mm wide steel wire cable tray in 54 mm depth directly onto the wall using the side rail of tray
 Use for horizontal mounting of steel wire cable tray runs. Incorporates slot and tab design for easy fixing
 Can also be clipped onto most steel wire cable trays as an ancillary mounting plate (see p. 87). Supplied singly without fasteners


■ Installation

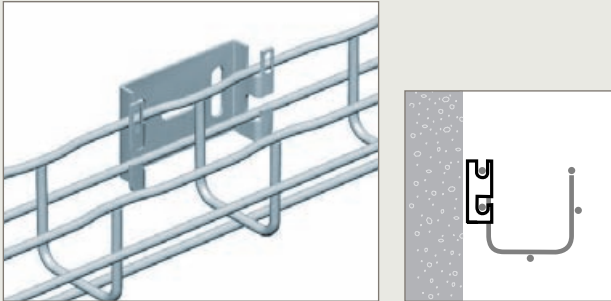

Mount directly onto wall using fasteners (not supplied)

■ Assembly

Securing CM50 to steel wire cable tray



Bend tabs with screwdriver to secure to steel wire cable tray




Fast assembling



Fixing without nuts and bolts

■ Dimensions and weights

54 mm 50 mm



Cat. Nos.	Weight (kg)			
	GS	GC	304L	316L
CM50	0-08	0-08	0-07	0-07

Please use Cat. No. when placing your order, see p. 20

All weights are given in Kilograms (kg)

Key :	GS	Pre-galvanised	304L	Stainless steel 304L
	GC	Hot dip galvanised after manufacture	316L	Stainless steel 316L



For detailed information related to finishes, refer to p. 116-117

All dimensions (mm) are nominal

■ CM50XL – universal mounting plates (large)

Use to fix 50 mm to 100 mm wide steel wire cable tray in 54 mm and 80 mm depths directly onto the wall using side rail of tray, and 100 mm to 600 mm wide tray in 30 mm to 105 mm depths (including CFG) using base of tray. Can be used for horizontal and vertical mounting of cable tray runs. Can also be used for ceiling mounting (see p. 69) and floor mounting (see p. 78). Incorporates slot and tab design for easy fixing. Supplied singly without fasteners


■ Installation

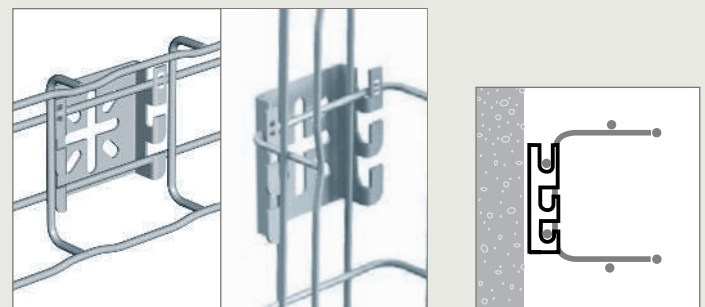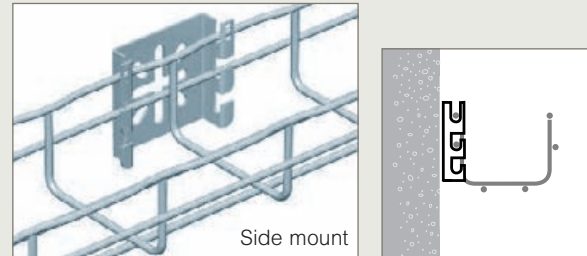

Base mount - horizontal Base mount - vertical

■ Assembly

Securing CM50XL to steel wire cable tray



Bend tabs with screwdriver to secure to steel wire cable tray



Fast assembling




Fixing without nuts and bolts

■ Dimensions and weights

54 mm → 80 mm 50 → 100 mm (side rail mounted)

30 mm → 105 mm 100 → 600 mm (base mounted)



Cat. Nos.	Weight (kg)			
	GS	GC	304L	316L
CM50XL	0-10	0-11	0-08	0-08

Please use Cat. No. when placing your order, see p. 20

All weights are given in Kilograms (kg)

➔ For ceiling mounting : see p. 69

➔ For floor mounting : see p. 78