


Copper Tube Lugs – 1A

T Range 99.9% PURE COPPER

The Termination Technology range of standard copper tube terminals is manufactured from seamless copper tube to BS2871/C106.

All terminals are provided with an inspection hole to ensure the conductor is fully inserted before crimping. A bell mouth also ensures a smooth transition from lug to cable, thus avoiding the problems of chafing where the component is subject to vibration. The internal barrel diameters suit standard cables as defined in BS6360.

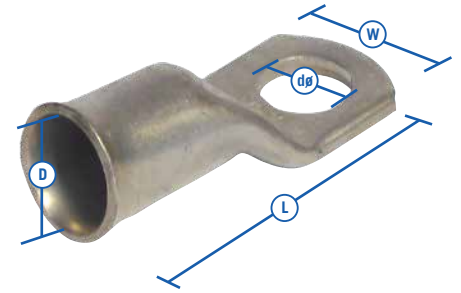

All Termination Technology terminals fully comply with BS EN 61238-1-2003 & IEC 61238-2003.

Part No.	Conductor Size mm ²	Stud mm	Length L	Width W	Inside Dia D	Hole Dia dg
T1.5-3	1.5	3	17.0	5.5	1.8	3.2
T1.5-4	1.5	4	19.5	8.0	1.9	4.3
T1.5-5	1.5	5	20.4	8.0	1.9	5.3
T2.5-3	2.5	3	18.0	5.5	2.4	3.2
T2.5-4	2.5	4	19.0	7.7	2.4	4.3
T2.5-5	2.5	5	21.2	10.0	2.4	5.3
T2.5-6	2.5	6	21.0	10.0	2.4	6.5
T4-4	4.0	4	21.0	10.0	3.0	4.3
T4-5	4.0	5	22.0	10.0	3.0	5.3
T4-6	4.0	6	23.5	10.0	3.0	6.5
T6-4	6.0	4	21.5	10.0	3.8	4.3
T6-5	6.0	5	24.5	10.0	3.8	5.3
T6-6	6.0	6	24.5	10.0	3.8	6.3
T6-8	6.0	8	27.0	12.0	3.8	8.3
T6-10	6.0	10	29.0	15.0	3.8	10.3
T6-BL	6.0	-	29.0	12.5	4.1	-
T10-5	10	5	26.0	11.0	4.4	5.1
T10-6	10	6	26.0	11.0	4.4	6.3
T10-8	10	8	29.5	16.0	4.4	8.2
T10-10	10	10	39.0	16.0	4.4	10.4
T10-12	10	12	39.0	18.0	4.4	12.7
T10-BL	10	-	39.0	18.0	4.4	-
T16-5	16	5	30.0	11.5	5.6	5.2
T16-6	16	6	30.0	11.5	5.6	6.3
T16-8	16	8	30.0	14.0	5.6	8.3
T16-10	16	10	35.5	18.0	5.6	10.3
T16-12	16	-	42.0	18.0	5.6	-
T25-5	25	5	32.5	13.8	7.0	5.2
T25-6	25	6	32.5	13.8	7.0	6.3
T25-8	25	8	32.5	13.8	7.0	8.2
T25-10	25	10	38.0	16.0	7.0	10.2
T25-12	25	12	38.0	18.0	7.0	12.8
T25-BL	25	-	38.0	16.0	7.0	-
T35-5	35	5	35.0	15.3	8.2	5.2
T35-6	35	6	35.0	15.3	8.2	6.3
T35-8	35	8	35.0	15.3	8.2	8.3
T35-10	35	10	40.5	15.3	8.2	10.3
T35-12	35	12	40.5	18.0	8.2	12.9
T35-14	35	14	40.5	19.6	8.2	14.8
T35-BL	35	-	40.5	18.0	8.2	-