







Electric Strike Installation Instruction

GK300 Series

Specification


Operating Voltage	12VDC, 24VDC, 12/24VDC
Voltage Tolerance	±15%
Current Draw	250mA/12VDC 150mA/24VDC
Operating Temperature	-10°C~+45°C
Humidity	0~95%
Optional Bracket	LP-025, LP-050

	Hollow Metal Frames	Wooden Frames	Bond Sensor Output	Installation	Application Locksets
GK300	●			Mortise Mount	
GK300M	●		●	Mortise Mount	
GK301		●		Mortise Mount	
GK301M		●	●	Mortise Mount	
GK302		●		Mortise Mount	
GK302M		●	●	Mortise Mount	
GK310	●			Mortise Mount	
GK310M	●		●	Mortise Mount	
GK311		●		Mortise Mount	
GK311M		●	●	Mortise Mount	
GK312		●		Mortise Mount	
GK312M		●	●	Mortise Mount	
GK350	●	●		Surface Mount	

GK300 series electric strikes are designed for spring latch or lockset (e.g.cylindrical locks). The latch bolt lock comprises a latch bolt and a Nib. The GK300 electric strike can easily be changed between fail-safe and fail secure modes.

GK300, GK300M
GK310, GK310M


Hollow Metal Frames



Electric Strike

GK301, GK301M
GK302, GK302M
GK312, GK312M
GK311, GK311M


Wooden Frames



Mechanical lock set (excluded)

GK350




Hollow Metal Frames





(Surface mount installation sketch GK350)

GK350

Wooden Frames




What is a Nib?
When the door is closed, the Nib makes the latch a dead bolt. The latch bolt locks into the strike keeper of the door frame to make sure that it is closed.



The hole cut oversized, it can use trimming plate to cover the gap to beautify the outward appearance.

Optional Brackets


Lip extension brackets for wide jamb



LP-050
50mm (L)





LP-025
25mm (L)




How to change Version?


Field selectable by changing position of screws




Installation Instruction




(1) Measure the latch position




(2) Mark the latch position




(3) Mount the supplied installation template and align to the marked line



(4) Drill and cut the hole according to the template supplied



(5) Tighten the fixing plug



(6) Connect the power and test the unit


Caution:

Proper gap must be reserved between the strike keeper and latch bolt to prevent failure of solenoid valve.

Connecting Diagram


Single Voltage (12 or 24VDC)

Bond Sensor Output: GK300M, GK301M, GK302M, GK310M, GK311M, GK312M
Reed Switch rated: 0.3A/6VDC

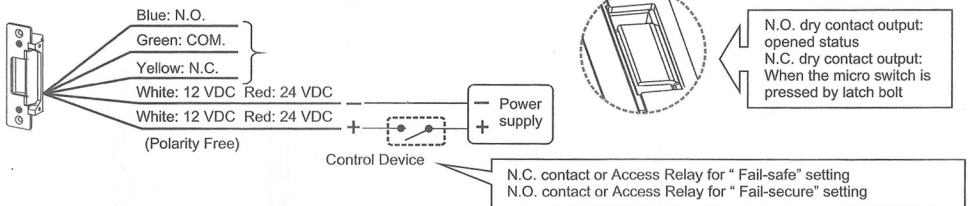


Dual Voltage (12/24VDC)


For the 12 VDC operation, the electric strikes have to connect in parallel.

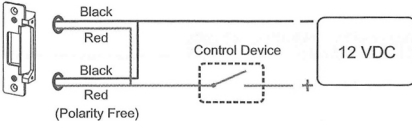

For the 24 VDC operation, the electric strikes have to connect in series.

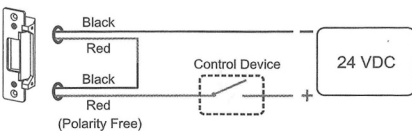

Butt Splice (IDC) Connector

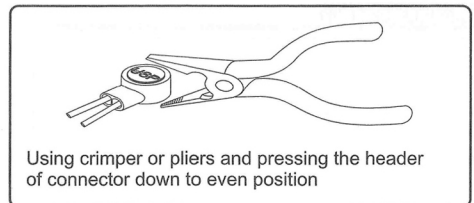

Using crimpers or pliers and pressing the header of connector down to even position