

ALARM CABLE TYPE 3 GRADE

- 7/0.2 CCA Conductors
- Max Resistance 155 Ohms/km
- PVC Insulated

Also available in LSF & PE Duct Grade

Note: Brown only available on 100m Reels in 6C & 8C LSF

Note: Screened options available as standard in white LSF



Part Code	Colour	Screened (add SCR)	100m	200m	500m
SFX/4C-TY3-PVC	Black/White	✓	✓	✗	✗
SFX/6C-TY3-PVC	Black/White	✓	✓	✓	✓
SFX/8C-TY3-PVC	Black/White	✓	✓	✓	✓
SFX/12C-TY3-PVC	Black/White	✓	✓	✓	✗

ALARM CABLE TYPE 2 GRADE

- 7/0.2 Copper Conductors
- Max Resistance 100 Ohms/km
- PVC Insulated


Note: If you require a copper screened alarm cable revert to 8C Type 1 below



Part Code	Colour	Screened (add SCR)	100m	200m	500m
SFX/4C-TY2-PVC	White	✗	✓	✗	✗
SFX/6C-TY2-PVC	White	✗	✓	✓	✗
SFX/8C-TY2-PVC	White	✗	✓	✓	✓
SFX/12C-TY2-PVC	White	✗	✓	✓	✗

ALARM CABLE TYPE 1 GRADE


- 7/0.2 Copper Conductors
- Max Resistance 100 Ohms/km
- LSZH Insulated
- LSZH Outer Sheath

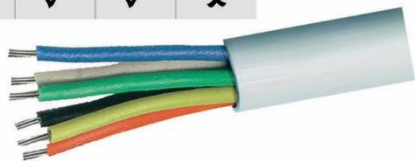

Part Code	Colour	Screened (add SCR)	100m	200m	500m
SFX/6C-TY1-LSZH	White	✗	✓	✓	✗
SFX/8C-TY1-LSZH	White	✓	✓	✓	✓
SFX/12C-TY1-LSZH	White	✗	✓	✓	✗

EXTERNAL / DB ALARM CABLE

- 7/0.2 Copper Conductors
- Max Resistance 100 Ohms/km
- PVC Insulated
- HDPE Outer Sheath

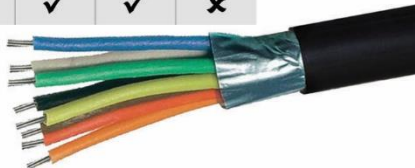

Part Code	Colour	Screened (add SCR)	100m	200m	500m	Cut to Length
SFX/6C-TY2-DB	Black	✗	✓	✓	✓	✓
SFX/8C-TY2-DB	Black	✓	✓	✓	✓	✓
SFX/12C-TY2-DB	Black	✓	✓	✓	✓	✓