



### Key Features

- White ABS plastic / satin die cast aluminium
- Air flow 126 m<sup>3</sup>/hr/ 3500 l/min
- Automatic sensor operated
- LED "Blu" down-lighter when in use
- Air speed from 250 Km/h
- ecoDRY 550 Cool air, only 2.3w per drying cycle
- ecoDRY 1100 Warm air
- Very quick 10 -14 second drying time
- Low noise level from 68 dB(A) at 2m
- Flow air flow outlet - blade / air curtain
- Compact - smallest high speed hand dryer in it's category
- Revolutionary double level anti-bacteria protection system
- Agion® Silver Antimicrobial treated and HEPA filter
- IP23 rating
- 3 year warranty

### 550w - 1100w Hand Dryers

Airflow are proud to present an Eco-Hygienic Drying System – the ecoDRY has double antibacterial protection as the internal plastic parts are treated with Agion® Silver Antimicrobial reducing bacteria by up to 99.9% on the dryer's surfaces. The ecoDRY is also fitted with an advanced HEPA filter protecting users from 99.997% of air bacteria – ensuring clean air on your hands at all times.

ecoDRY offers superior performance in drying time at a very quick 10 – 14 seconds.

ecoDRY 550 cool air unit only consumes 2.3w per drying cycle hence qualifying for Airflow's ecoair accreditation.

ecoDRY 1100 models have heating elements for those who prefer a conventional warm air drying system.

The product boasts a contemporary design with ergonomic features making it stand out from the competition – a drying system to aspire to for your wash room.



### Models


- White ABS plastic
- Satin Die cast aluminium



### Technical Data

Specification	ecoDRY 550 ABS	ecoDRY 550 Satin	ecoDRY 1100 ABS	ecoDRY 1100 Satin
Function	Automatic Sensor	Automatic Sensor	Automatic Sensor	Automatic Sensor
Material	ABS	Die Cast Aluminium	ABS	Die Cast Aluminium
Colour	White	Satin Metal	White	Satin Metal
Absorbtion Heating Element	N/A	N/A	550w	550w
Absorbtion Motor	550w/ 2.3w per drying cycle	550w/ 2.3w per drying cycle	550w	550w
Total Power	550w	550w	1100w	1100w
Air Speed	250km/h	250km/h	325km/h	325km/h
Fan speed	26000 r.p.m.	26000 r.p.m.	30000 r.p.m.	30000 r.p.m.
Air Flow Performance	126m <sup>3</sup> /hr / 35l/sec	126m <sup>3</sup> /hr / 35l/sec	187m <sup>3</sup> /hr / 52l/sec	187m <sup>3</sup> /hr / 52l/sec
Drying Time	10 - 15 sec	10 - 15 sec	10 - 15 sec	10 - 15 sec
Noise Level (at 2m)	68dB(A)	68dB(A)	75dB(A)	75dB(A)
Protection Rating	IP23	IP23	IP23	IP23
Electrical Insulation	Class II	Class II	Class II	Class II
Certification	CE	CE	CE	CE
Weight (Kg)	3,0	5,0	3,0	5,0
Dimensions (H x W x D)mm	285 x 221 x 157	285 x 221 x 157	285 x 221 x 157	285 x 221 x 157
Product Codes	90000242	90000243	90000518	90000519

### Dimensions

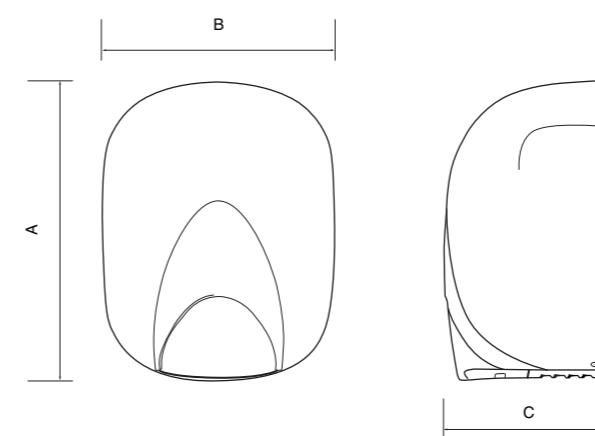

Model	A	B	C
ecoDRY	285	221	157

### Flow Mechanism



### Consumables / Spare Parts

The HEPA filter and replacement carbon brushes are available on request from your ecoDRY stockist or visit: [airflow.com](http://airflow.com)