

# Aura Shower Kit

Shower ventilation



## Key Features

- Axial in-line fan
- Ventilation up to 108 m<sup>3</sup>/hr
- Designed for ventilation / lighting above shower cubicles
- Use for both supply or extraction
- Compact and quiet in operation
- Mounting bracket included
- Ductable
- Halogen lamp option
- IPX4 rating
- 3 year warranty

## Aura Shower Kit range

Highly reliable fan in a modular design for ease of installation and maintenance. Aura In-Line Fans are designed to provide extraction levels that comply with the latest Building Regulations.

The fans are manually operated by a remote switch (switch not supplied). Timer control versions are also available. Install in-line with ducting for a quiet and discreet installation.

The Aura in-line fan comes with a fixing bracket and is compact, attractively styled and ideal for short duct runs. They are the ideal solution for removing damp moist air, odours and airborne pollutants from toilets and bathrooms.



ALWAYS PULL FLEXIBLE DUCTING TAUGHT TO ENSURE INSTALLED PERFORMANCE AIR FLOW.



## Models

- Basic** Control by Remote Switch
- Timer** Timer can be set to run on between 2 and 30 minutes

## Contents of Kits

- 9041420** Aura 100B, 3m flex duct, ties, extract valve, external grille
- 9041419** Aura 100T, 3m flex duct, ties, extract valve, external grille
- 9041422** Aura 100B, 3m flex duct, ties, halogen lamp + chrome and white grilles, external grille
- 9041421** Aura 100T, 3m flex duct, ties, halogen lamp + chrome and white grilles, external grille




## Technical Data

Specification	Aura Shower Kit	Aura T Shower Kit	Aura Shower Kit with Hallogen Lamp	Aura T Shower Kit with Hallogen Lamp
Air flow m <sup>3</sup> /hr* / l/sec*	108 / 30	108 / 30	108 / 30	108 / 30
Fan type	Axial	Axial	Axial	Axial
Controls	Basic	Timer (adjustable)	Basic	Timer (adjustable)
Mounting	In-Line	In-Line	In-Line	In-Line
Sound pressure dB(A)@3m	39	39	39	39
Power watts	16	16	16	16
Amps	0.01	0.01	0.01	0.01
Specific Fan Power (SFP)	0.53	0.53	0.53	0.53
Duct diameter (mm)	100	100	100	100
Voltage	230v / 1ph / 50Hz	230v / 1ph / 50Hz	230v / 1ph / 50Hz	230v / 1ph / 50Hz
Rating	IPX4	IPX4	IPX4	IPX4
Material finish	ABS	ABS	ABS	ABS
Weight (kg)	0.41	0.41	0.41	0.41
Dimensions (H x W x D) mm	110 x 160 x 113	110 x 160 x 113	110 x 160 x 113	110 x 160 x 113
Part No.	<b>9041420</b>	<b>9041419</b>	<b>9041422</b>	<b>9041421</b>


\* Air flow at free discharge

## Dimensions (mm)

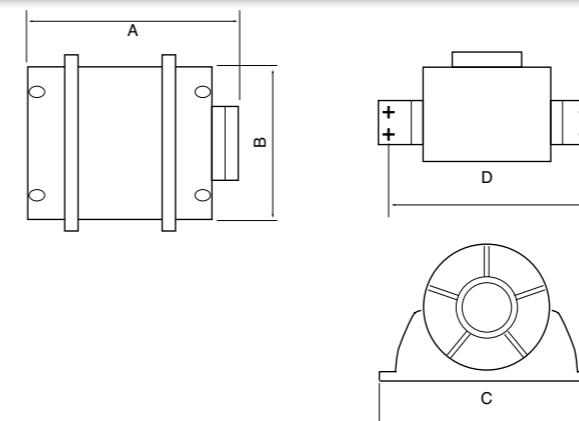

Model	A	B	C	D
Aura shower kit	110	113	160	144

## Performance

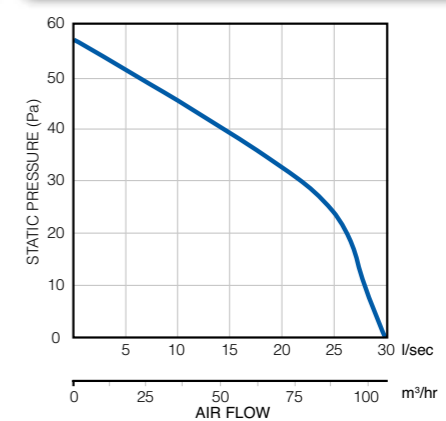

## Controls and Accessories

A range of accessories including flexible and rigid ducting kits, controls, switches and grilles are available.

See accessories for more details.

