

Monsoon UMD Mixed Flow Fans

- High performance and fully speed controllable
- Motor attached to fan body by two quick release clips for maintenance
- Two speed motor with option of overrun timer (2 to 30 minutes)
- Motor equipped with Standard Thermal Overload Protection (STOP), IPX4
- Working temperature of up to 60°, supply voltage 220-240V 50Hz



CODE	DESCRIPTION
UMD100	100mm Standard In-line Fan (198m ³ /h)
UMD100T	100mm Timer In-line Fan (198m ³ /h)
UMD125	125mm Standard In-line Fan (280m ³ /h)
UMD125T	125mm Timer In-line Fan (280m ³ /h)
UMD150	150mm Standard In-line Fan (552m ³ /h)
UMD150T	150mm Timer In-line Fan (552m ³ /h)


Please see p62 for larger models.

Technical data

	UMD100		UMD125		UMD150	
	HIGH	LOW	HIGH	LOW	HIGH	LOW
Power (W)	24	19	37	23	60	30
Current (A)	0.1	0.09	0.26	0.19	0.27	0.17
Maximum air flow (m ³ /h)	198	155	280	220	552	467
Sound @ 3m dB(A)	35	28	36	29	44	33
Rotation speed (min ⁻¹)	1710	1460	2500	1960	2450	1670

Dimensions (mm)

MODEL	H	W	L	ØD
UMD100	212	230	252.5	99

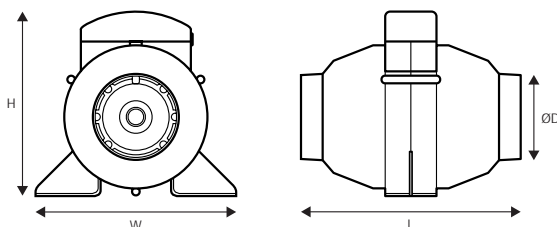

MODEL	H	W	L	ØD
UMD125	220	178	259	122
UMD150	256	200	350	147

