

SILENT 125 & 150



Whisper Quiet Kitchen & Utility Room Fans



Range of 125mm and 150mm domestic axial extract fans for wall or ceiling installations, designed to solve ventilation problems in utility rooms and kitchens. Fitted with motors mounted on silent elastic blocks, the fans deliver incredibly silent running and exceptional performance with stylish features.

Features

- Sealed for life ball bearings
- Silent elastic blocks
- IP45 rated
- Backdraught shutter and airflow guide vanes as standard
- Five year guarantee

Benefits

- Incredibly silent running
- High performance
- Significant energy savings
- Complies with building regulations

Optional Features ▼



Adjustable Timer

After disconnection, the shut off time can be delayed between 1 and 30 minutes.



Adjustable Humidity Sensor

The level of humidity for the kitchen/utility room can be chosen from between 60% and 90% RH. The extract fan will continue to work long enough to reach the selected level.



Pullcord


Supplied with pullcord override.

ORDER CODE	SIL125S	SIL125T	SIL125HT	SIL150S	SIL150T	SIL150HT	SIL150P	SIL150HTP
Pilot Light	•	•	•	•	•	•	•	•
Sealed For Life Ball Bearings	•	•	•	•	•	•	•	•
Silent Elastic Blocks	•	•	•	•	•	•	•	•
Backdraught Shutter	•	•	•	•	•	•	•	•
Adjustable Timer		•	•		•	•		•
Adjustable Humidity Sensor			•			•		•
Pullcord							•	•




Performance Curve ▾

SILENT 125

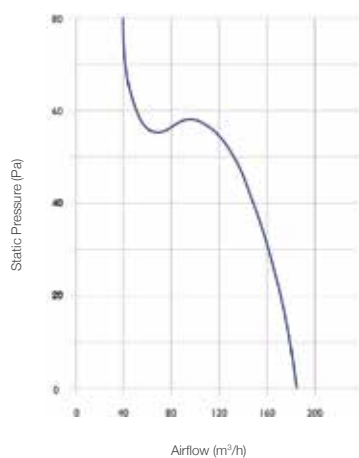

SILENT 150

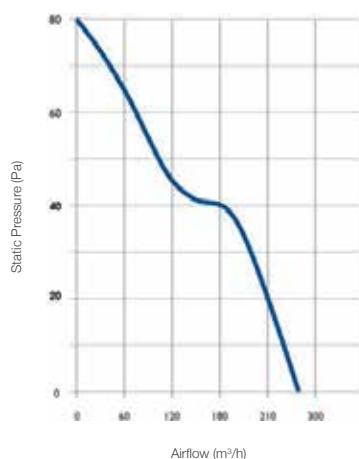

Technical Specification ▾

Product

The SILENT 125 & 150 are innovative domestic axial extract fans designed to offer a low level of noise. The SILENT 125 is designed to solve ventilation problems in small rooms and the SILENT 150 is designed for kitchens. The fans are fitted with a pilot light, backdraught shutter and airflow guide vanes as standard.

Applications

The SILENT 125 & 150 can be wall or ceiling mounted to meet the Building Regulations - Part F (England), Scottish Building Regulations Section 3 and Part K (Northern Ireland). The fans will ventilate domestic small rooms and kitchens.

Performance

MODEL	SILENT 125	SILENT 150
Speed (r.p.m.)	2350	1700
Watts (W)	16	29
Voltage (V) 50Hz	230	230
Airflow l/s (m³/h)	50 (180)	78 (280)
dB(A) @ 3m	33	32
Weight (Kg)	0.77	1.25
IP Rating	IP45	IP45
Ø Duct (mm)	125	150

Installation

Full installation guide is enclosed with all products; or sent separately in advance - if required.

Motor

Is a 230V 50Hz A/C motor, which is assembled on silent elastic blocks and fitted with ball bearings for enhanced working life.

Fan

The impeller is axial flow type.

Servicing / Maintenance

The extract fan only requires periodical cleaning using a cloth impregnated with a soft detergent.

Guarantee

The SILENT 125 and 150 is covered by a 5 year warranty.


Compliance

CE

Related Information ▾

Description	Page Number(s)
SILENT Range Introduction	76-77
Domestic Ancillaries	135-140

Dimensions (mm) ▾

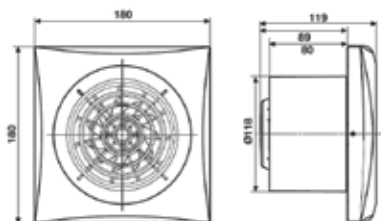

MODEL	A	B	C	D	ØE
SILENT 125	180	180	119	80	118
SILENT 150	214	214	149	95	147

Performance Data ▾

MODEL	SILENT 125	SILENT 150
Speed (r.p.m.)	2350	1700
Watts (W)	16	29
Voltage (V) 50Hz	230	230
Airflow l/s (m³/h)	50 (180)	78 (280)
dB(A) @ 3m	33	32
Weight (Kg)	0.77	1.25
IP Rating	II/IP45	II/IP45
Ø Duct (mm)	125	150

Options & Ancillaries ▾

Description	Code(s)
Standard Wall Kit	1RDEFWAK125 1RDEFWAK150
Rigid Ducting	1RD125X2M 1RD150X2M
Flexible Hose Ducting	1RDFLEX125X3M 1RDFLEX125X6M 1RDFLEX150X3M
Fixed Louvre Grille	1RDGRILL125 1RDGRILL150