

## Saletto (LPPE) - Series B



## Product Description

Sleek, clean look, low-profile panel heater allowing the programming of multiple 7-day timer profiles via a backlit LCD display and capacitive buttons

## Key Features


- Modern panel design with louvered upward facing grille for optimum heat circulation
- Customisable heating with four time and temperature settings per day.
- Adaptive start pre-heating and open window detection auto-shutdown
- Slimline design that covers traditional panel heater fixing marks
- Aesthetics to compliment storage heater ranges
- Smartphone app controllable via the Dimplex Control system\*

\*Requires additional hardware, sold separately. A Dimplex Hub and RFM 'Radio Frequency Module' device are required for this product to connect to the Dimplex Control system and be controlled via the Dimplex Control smartphone app

## Technical Details

<b>Controls</b>	Digitally controlled, Electronic Thermostat accurate to ( $\pm 0.2^{\circ}\text{C}$ ). Setpoint range (7-30°C)  Timer modes: 7 Day Programmable User Timer, Out All Day, Home All Day  Continuous heat modes: Eco, Manual, Frost Protect. Additional modes: Away, Boost, Setback, Runback
<b>Controller UI</b>	<ul style="list-style-type: none"> <li>• Graphical display with RGB backlight</li> <li>• Capacitive buttons with audio feedback</li> <li>• User replaceable battery (Coin-Type)</li> </ul>
<b>Controller Functions</b>	<ul style="list-style-type: none"> <li>• Open window detection</li> <li>• Adaptive-start,</li> <li>• Advance time period</li> <li>• Bluetooth for software updates</li> <li>• Child Lock &amp; Heater Lock (PIN-based)</li> </ul>
<b>Construction</b>	<ul style="list-style-type: none"> <li>• Durable epoxy-polyester powder coated steel casing with louvered upward facing grille</li> <li>• Advanced controls with cap-sense technology for total flexibility of heating</li> </ul>
<b>Element</b>	Compact, finned, mineral filled sheathed element
<b>Installation</b>	<ul style="list-style-type: none"> <li>• 1 H-frame wall bracket for easy fixing</li> </ul>
<b>Safety</b>	<ul style="list-style-type: none"> <li>• Thermal cut-out. Auto reset type</li> <li>• Overheat detection</li> </ul>
<b>IP Rating</b>	IP24
<b>Battery Back-up</b>	CR2032 Lithium Manganese Dioxide 3V coin cell battery to backup real time clock. Battery life > 5 years.
<b>Supply</b>	1.3 metres fitted, 3 core for fused spur installation, 1/N/PE -230-240 V, 50Hz Class I, with earth wire
<b>Colour / Finish</b>	Metal Chassis, Air Outlet Grille & Control Moulding - Traffic White (RAL 9016)

## Dimensions

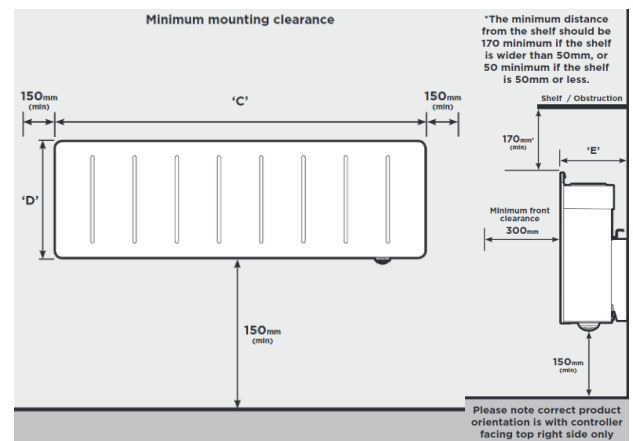

Model/Item No. (EAN-Code 5011139+Item No.)	091246 LPP050E	091239 LPP075E	091253 LPP100E	091260 LPP150E
Output (kW)	0.50	0.75	1.00	1.50
Height 'D' (mm)	235	235	235	235
Width 'C' (mm)	746	736	877	1142
Depth 'E' (mm)	100	100	100	100
Weight (Kg)	6.7	6.7	7.6	9.9
Packaging Details				
Height (mm)	364	320	360	365
Width (mm)	800	720	930	1195
Depth (mm)	175	160	170	177
Packed Weight (Kg)	7.2	7	7.8	10
Ti	7	7	6	5
Hi	5	5	5	4
Pallet Quantity (2.4m high)	35	35	30	20

## Warranty & Approvals

<b>Approvals</b>	CE, BEAB
<b>Warranty</b>	2 Years
<b>Country of Origin</b>	United Kingdom
<b>Manufacturer</b>	Glen Dimplex Heating & Ventilation (GDC Group Ltd)