


A new take on traditional moulded wiring accessories manufactured in bright white Urea.

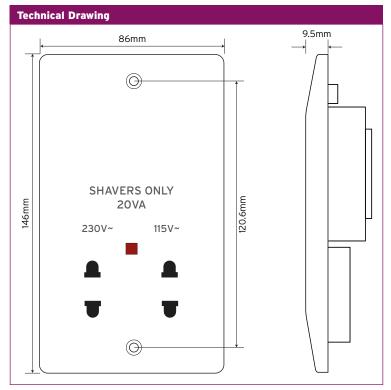

Technical Specification	s
Material Composition	Front Plate - Urea Rear Housing - Urea & Nylon Terminals - Brass, Terminal Screws: Steel & Yellow Passivated Earth Strap - Mild Steel, Silver "on-lay" Copper / Brass Contacts
Voltage	240V~ 50Hz
Current Rating	20VA at 230V or 115V
Terminal Size	3.5mm ø
Torque Value	0.4Nm
Cable Size	2 x 1.5mm <sup>2</sup> or 1 x 2.5mm <sup>2</sup>
Back Box Depth	47mm
Twin Earth	Yes
Double Pole	Yes
Warranty	20 Years
Anti Microbial Certified	Yes
IP Rating	IP21
Operational Temperature	-5° to +40°C
Standards	The Low Voltage Directive 2006/95/EC BS EN 61558-1:1997 + A1:1998 + A11:2003, IEC 60884-1 BS 546 (Socket Outlet Part)
Dimensions	146x86x9.5mm (HxWxD)