

Object :
Installation :
Project number :
Date :



1 Luminaire data

1.1 ANSELL, FLOODLIGHTING - Eden LED FI... (AEDELED50/CW)

1.1.1 Data sheet

Manufacturer: ANSELL



AEDELED50/CW Rectangular projector FLOODLIGHTING - Eden LED Floodlight

AEDELED50/CW
Floodlighting
Eden LED Floodlight
Supplied c/w Integral Driver

- Compact and economic LED Floodlight
 - 50W comparable light output of 70W HQI
 - Bracket design allows installation without removing mounting bracket
 - PIR versions complete with manual override facility
 - Pre-wired with 1 metre of rubber insulated cable for ease of installation
 - Cool white and warm white options available
 - LED lifespan L90 36,000 hours
 - Non-dimmable
-
- Suitable for both internal and external use
 - 2 Year Product Warranty
 - IP65



Luminaire data

Absolute Photometry
Luminaire efficacy : 87.18 lm/W
Classification : A40 ↓100.0% ↑0.0%
CIE Flux Codes : 51 86 99 100 100
UGR 4H 8H : 30.4 / 30.7
Control gear : Electronic ballast
Power : 50 W
Luminous flux : 4359 lm

Equipped with

Quantity : 1
Designation : LED single 840
Colour : 840/4000K
Socket : --
Colour reproduction : 1B/80...89

Dimensions : 196 mm x 143 mm x 31 mm

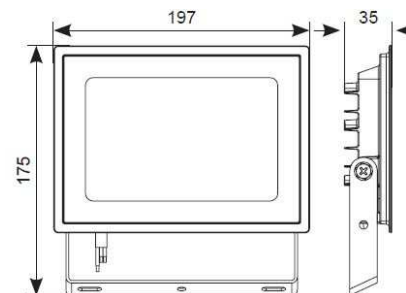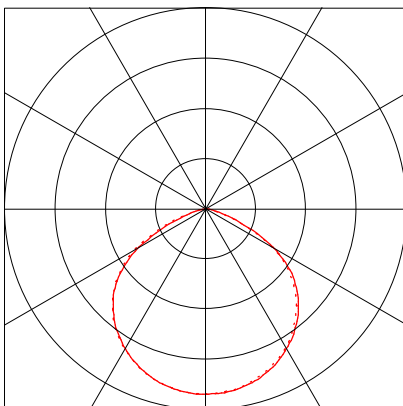


Object :
 Installation :
 Project number :
 Date :



1.1 ANSELL, FLOODLIGHTING - Eden LED FI... (AEDELED50/CW)

1.1.2 LDC

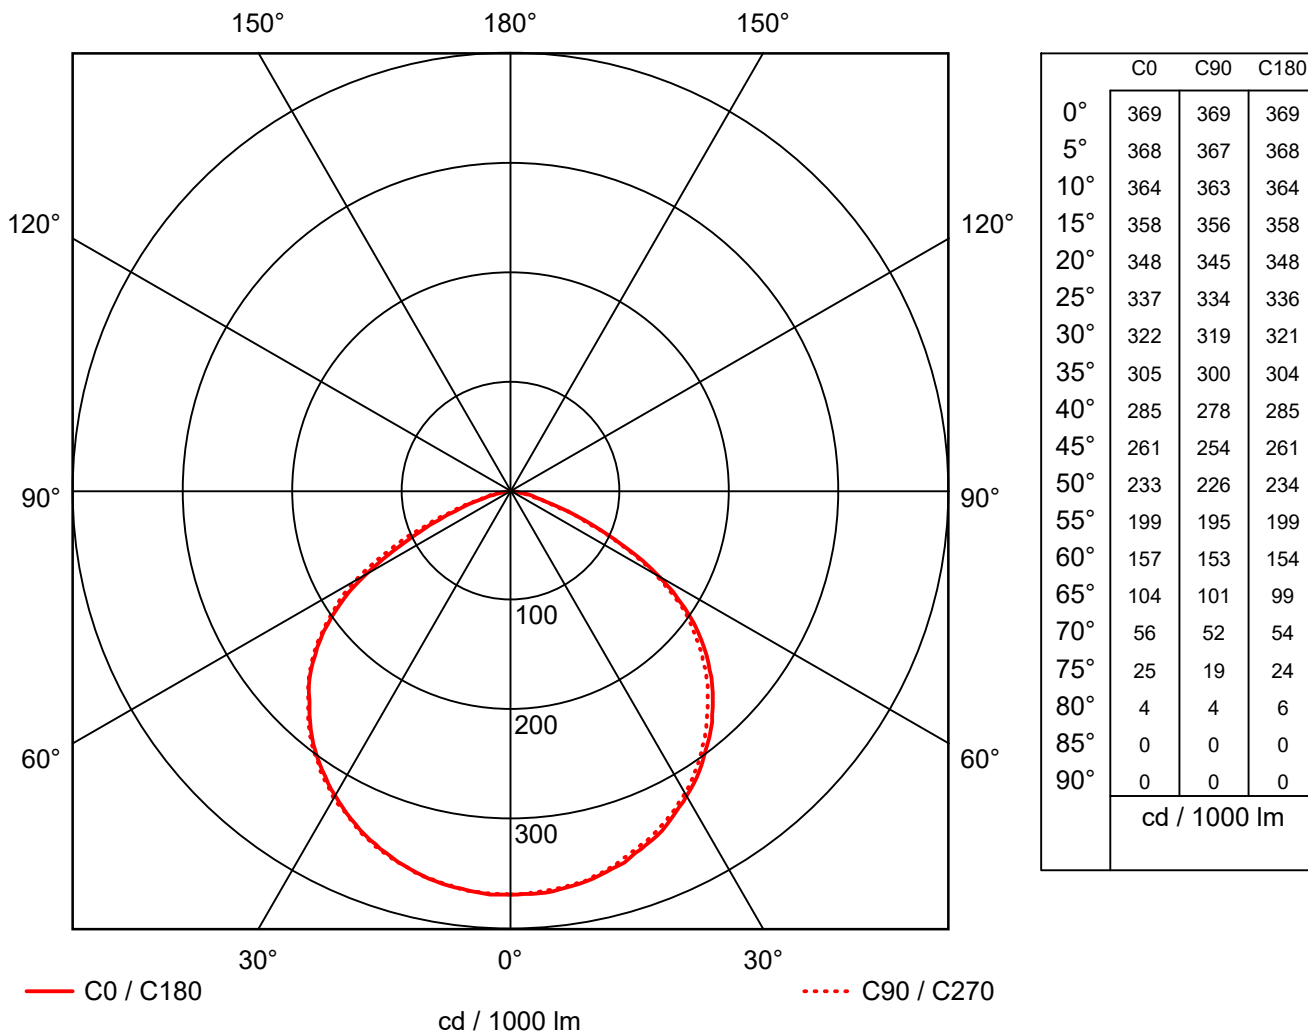

Manufacturer : ANSELL
 Order number : AEDELED50/CW
 Luminaire name : FLOODLIGHTING - Eden LED Floodlight
 Equipment : 1 x LED single 840 50 W / 4359 lm
 Dimensions : L 196 mm x W 143 mm x H 31 mm
 File name : rlx_20200114144817.Idt

Luminaire efficacy : 87.18 lm/W (A40)
 Light distribution :
 Beam Angle : 56.9° C0
 56.3° C90
 56.7° C180
 57.5° C270