

niglon


Circuit Protection

PCU3632M

Isolator Controlled Consumer Unit Right hand Incomer Double Row board



Technical Drawing

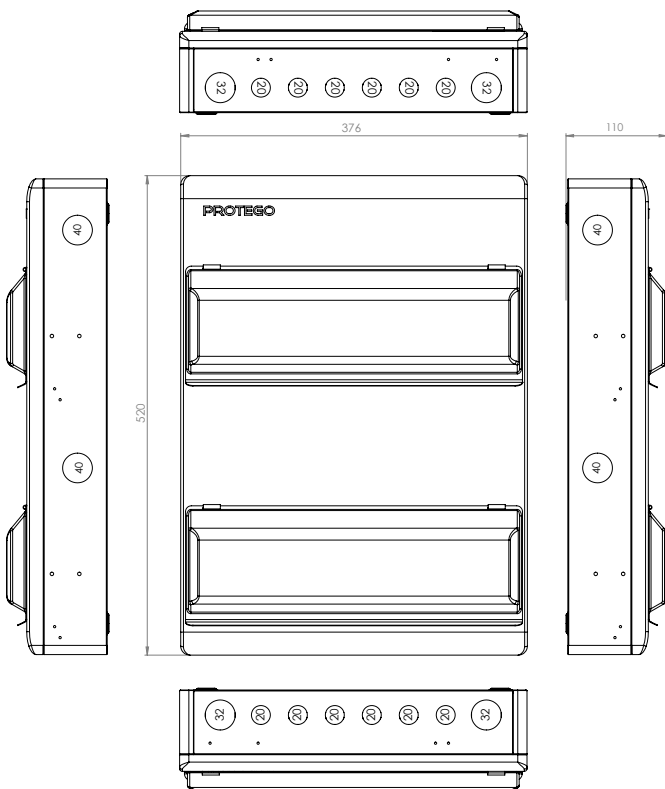

Technical Specifications

Material Composition	Steel (Powder Coated)
Configurations	36 Module 32 Free Ways 125A DP Isolator
Rated Operational Voltage (Un/Ue)	230V AC
Rated Current of Assembly (InA)	125A
Rated Frequency	50Hz
Main Switch Terminal Capacity	50mm ²
IP Rating (Ingress Protection)	IP20
IK Rating (Impact Protection)	IK05
Dimensions	376 (W) x 520 (H) x 110mm (D)
Standards	BS7671:2018, BS EN61439-3
125A Mains Isolator Manufactured to	EN60947:3
Certification	Semko, CE, UKCA

All specifications are SEMKO Certified