


GGBL3020

Lisse - switched socket - 13 A - 230 V - 2 gangs - white

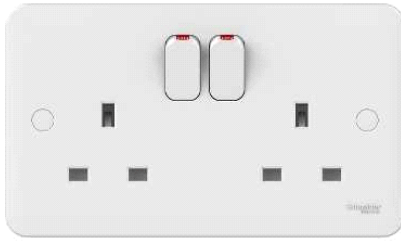

Main

Range	Lisse
Aesthetic name	White moulded
Product or component type	Switched socket
Device presentation	Complete product
Outlet standard	British
Colour tint	Matt white
Quantity per set	Set of 5
Type of packing	Carton

Complementary

Switch function	1-pole
Rated current	13 A, 250 V AC 50 Hz
Actuator	Rocker
Number of gangs	2 gangs
Pilot light	Without LED
Fixing mode	By screws
Connections - terminals	Screw terminals
Material	Urea (carbamide)
Type of installation	Indoor
Depth	36 mm
Width	149 mm
Height	87 mm
Product weight	0.149 kg

Environment

standards	BS 1363-2
IP degree of protection	IP20

Offer Sustainability

Sustainable offer status	Not Green Premium product
RoHS (date code: YYWW)	Compliant - since 1642 - Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold
Product end of life instructions	Need no specific recycling operations

The information provided in this documentation contains general descriptions and/or technical characteristics of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.