


GGBL3060L

Lisse - switched socket - lockable - 13 A - 230 V -2
gangs - white

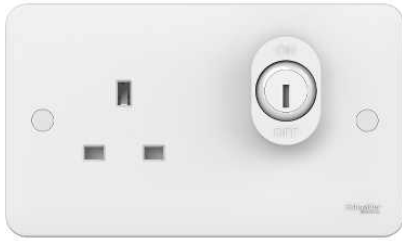

Main

Range	Lisse
Aesthetic name	White moulded
Product or component type	Switched socket
Device presentation	Complete product
Outlet standard	British
Colour tint	Matt white
Quantity per set	Set of 5
Type of packing	Carton

Complementary

Switch function	2-pole
Rated current	13 A, 250 V AC 50 Hz
Actuator	Key
Number of gangs	2 gangs
Pilot light	Without LED
Fixing mode	By screws
Connections - terminals	Screw terminals
Material	Urea (carbamide)
Type of installation	Indoor
Depth	43.8 mm
Width	148.5 mm
Height	87 mm

Environment

standards	BS 1363-2
IP degree of protection	IP20

Offer Sustainability

Sustainable offer status	Not Green Premium product
RoHS (date code: YYWW)	Compliant - since 1642 - Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold
Product end of life instructions	Need no specific recycling operations