


# Heat Shrink Sleeves

Part Number	Inside Diameter (before shrinking)	Inside Diameter (after shrinking)
HS1.2	1.2mm	0.6mm
HS1.6	1.6mm	0.8mm
HS2.4	2.4mm	1.2mm
HS3.2	3.2mm	1.6mm
HS4.8	4.8mm	2.4mm
HS6.4	6.4mm	3.2mm
HS9.5	9.5mm	4.7mm
HS12	12.7mm	6.4mm
HS19	19.1mm	9.5mm
HS25	25.4mm	12.7mm
HS38	38.1mm	19.0mm
HS50	50.8mm	25.4mm
HS75	76.2mm	38.1mm
HS101	101.6mm	50.8mm

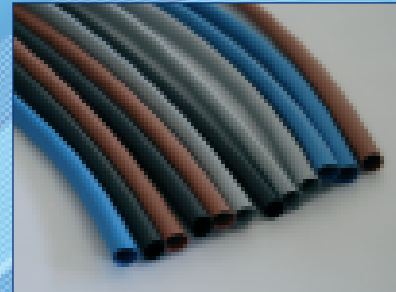

**Cable Termination Components**  
Heatshrink sleeving is available in black, clear, blue, brown, grey, yellow, white, green, red and green/yellow. Please specify which colour you require when ordering. We can supply on a roll or cut to length required.

Our heatshrink has a continuous operating temperature of -55°C to 125°C and is flame retardant, UL Approved.

Adhesive lined medium dual wall heatshrink and endcaps are also available ex stock.

**HSG 240 Heat Shrink Gun**



Also available in handy boxes

## Heat Shrink Packs

Part Number	Length (mm)
Part No	Size
HSP6	6.4mm – 3.2mm
HSP95	9.5mm – 4.7mm
HSP12	12.7mm – 6.4mm
HSP19	19.1mm – 9.5mm
HSP25	25.4mm – 12.7mm
HSP38	38.1mm – 19.0mm

## HS Sleeving Layflat Dimensions

HS Size	Dimensions (mm)	HS Size	Dimensions (mm)
3.2	5	25	44
4.8	8	38	60
6.4	11	50	83
9.5	17	75	128
12.7	21	100	160
19	31	n.b. all dimensions stated are nominal	

Telephone: 01453 821798 Fax: 01453 823736 Email: [sales@ctcukltd.co.uk](mailto:sales@ctcukltd.co.uk)