


## Screened Standard Outlets

Low insertion loss  
 Screened to EN 50083-2: > 65dB to 1 GHz and >55dB to 2.2 GHz  
 Compact screened housing  
 Easy cables connection and access  
 For cable with 1mm conductor (PF 100, H109F, QF100.etc)  
 Require 35mm deep pattress

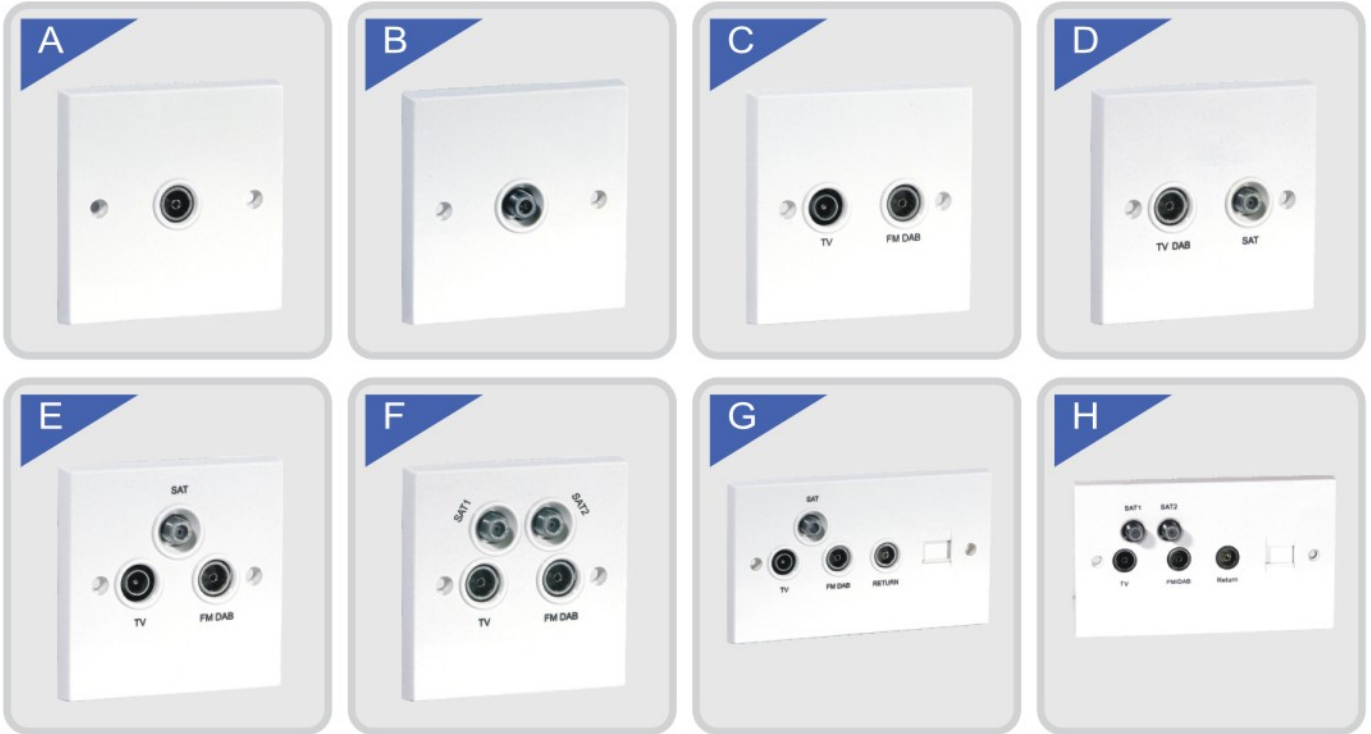

|          |                |   |  |
|----------|----------------|---|--|
| <b>A</b> | <b>PSW111</b>  | Screened single IEC Coax outlet, non-isolated<br>Low loss, minimal ingress  | TV/FM/DAB outlet   |
| <b>B</b> | <b>PSW113</b>  | Screened single F-type satellite outlet<br>Low loss, minimal ingress and negligible module cross talk   | SAT outlet   |
| <b>C</b> | <b>PSW122</b>  | Screened diplexed outlet<br>Low loss, minimal ingress and negligible module cross talk  | TV and FM/DAB outlets  |
| <b>D</b> | <b>PSW123</b>  | Screened diplexed satellite and TV/FM/DAB outlet<br>Low loss, minimal ingress and negligible module cross talk  | SAT1, TV/FM/DAB outlets  |
| <b>E</b> | <b>PSW132</b>  | Screened diplexed outlet<br>Low loss, minimal ingress and negligible module cross talk  | SAT1, TV/FM/DAB outlets  |
| <b>F</b> | <b>PSW241</b>  | Screened quadplexed outlet<br>Ideal for Sky™ applications with low loss, minimal ingress and negligible module cross talk                               | SAT1, SAT2,<br>TV and FM/DAB outlets                                     |
| <b>G</b> | <b>PSW242T</b> | Screened triplexed outlet with return and telephone socket ideal for Sky™ applications with low loss, minimal ingress and negligible module cross talk  | SAT1, TV and FM/DAB Return and telephone outlets<br>Telephone jack       |
| <b>H</b> | <b>PSW351T</b> | Screened quadplexed outlet with return and telephone socket ideal for Sky™ applications with low loss, minimal ingress and negligible module cross talk | SAT1, SAT2, TV and FM/DAB Return and telephone outlets<br>Telephone jack |