



IP20 LED BATTEN

High performance slimline LED Batten luminaires

The new integrated LED IP20 Batten is a High Performance range of luminaires. They are designed to replace traditional T8 batten fixtures and are available in; Single versions at 600mm, 1200mm, 1500mm and 1800mm.


LED IP20 Batten delivers high performance with up to 2900 lumen output and up to 122lm/W efficiency in the Single version.

The LED IP20 Batten is slimline and versatile and provides an ideal solution for interior applications such as kitchens, living rooms, corridors, workshops and garages.

A quick installation is guaranteed through push-in design of the housing and easy wiring connectors, with no screwdriver needed. LED IP20 Batten is available in neutral white (4000K), with Twin versions also available.


Features

- 8W, 16W, 18W and 24W LED batten luminaires (Single) 16W, 30W ,36W ,48W (Twin)
- Impressive performance, up to 3300lm
- Highly efficient - with up to 122lm/W
- Available in neutral white (4000K)
- Quick installation through push-in design of the housing and ease wiring connectors, no screwdriver needed
- Available in white finnish
- A slimline and versatile design
- LED technology provides energy efficient solution and reduced maintenance costs with 25,000 hours lifetime
- Energy class: A++, A+, A




Item number	Description	Voltage (V)	Watt (W)	Lumen	Efficiency (lm/w)	Beam Angles (°)	CRI	Color Temp. (K)	IP rating	IK Rating	Housing Color	Length (mm)	Width (mm)	Height (mm)	Lifetime (Hrs)
0045158	LED IP20 BATTEN L600 SINGLE 4K	220-240	8	920	115	175	80	4000	IP20	IK02	white	600	42.5	47.55	25,000
0045159	LED IP20 BATTEN L1200 SINGLE 4K	220-240	16	1900	120	175	80	4000	IP20	IK02	white	1200	42.5	47.55	25,000
0045160	LED IP20 BATTEN L1500 SINGLE 4K	220-240	18	2200	122	175	80	4000	IP20	IK02	white	1500	42.5	47.55	25,000
0045161	LED IP20 BATTEN L1800 SINGLE 4K	220-240	24	2900	122	175	80	4000	IP20	IK02	white	1800	42.5	47.55	25,000
0045162	LED IP20 BATTEN L600 TWIN 4K	220-240	24	1800	113	175	80	4000	IP20	IK02	white	600	81.5	47.55	25,000
0045163	LED IP20 BATTEN L1200 TWIN 4K	220-240	24	3300	110	175	80	4000	IP20	IK02	white	1200	81.5	47.55	25,000
0045164	LED IP20 BATTEN L1500 TWIN 4K	220-240	24	1800	113	175	80	4000	IP20	IK02	white	600	81.5	47.55	25,000
0045165	LED IP20 BATTEN L1800 TWIN 4K	220-240	24	1800	113	175	80	4000	IP20	IK02	white	600	81.5	47.55	25,000

Photometric data

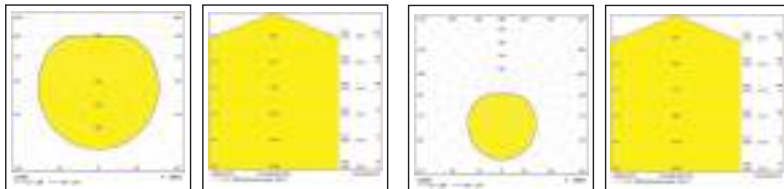

L600

L1200

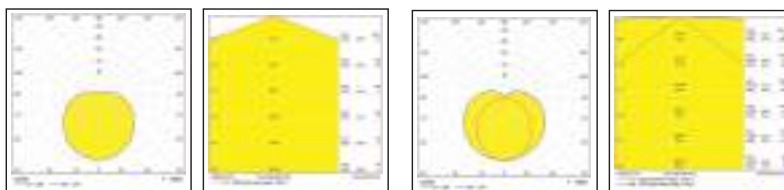

L1500


L1800

Twin



L600

L1200

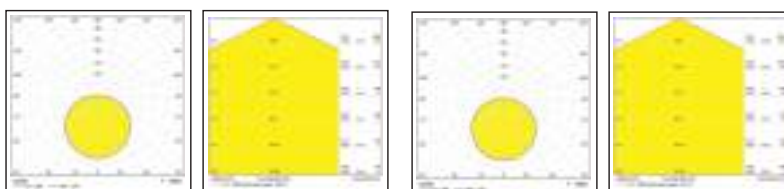


L1500

L1800

Dimensions (mm)


IP20 Batten 600mm

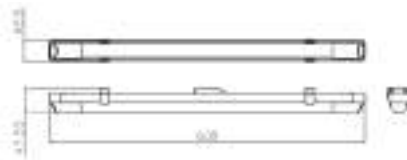

IP20 Batten 1200mm



IP20 Batten 1500mm

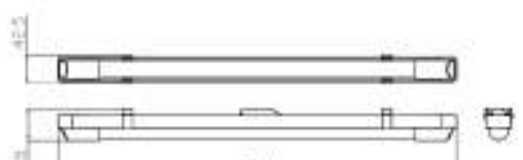

IP20 Batten 1800mm

