

## IP20 LED Batten

LED IP20 BATTEN L1500 SINGLE 4000K

0045160

### Product features

- full range of LED Battens to replace traditional T8 battens (600mm, 1200mm, 1500mm and 1800mm), ease of installation, 18W, 2200 lum, 4000K, 25000h lifetime



### PRODUCT OVERVIEW

IPC Code	0045160
Product name	LED IP20 BATTEN L1500 SINGLE 4000K
Technology	LED
General application	Residential & Consumer,
Certifications	EUNEW009
ETIM Class	EC000109
Fixture luminous flux (lm)	2200
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Photobiological Risk Group	RG0
Total power consumption (W)	18
Electrical protection	Class I
IP rating	IP20
IK rating	IK02
Product EAN number	5410288451602
Lamps	No
Included lamp	INTEGRATED LED

### DATA TABLE

#### General data

IPC Code	0045160
Product name	LED IP20 BATTEN L1500 SINGLE 4000K
Technology	LED
General application	Residential & Consumer,
Certifications	EUNEW009
ETIM Class	EC000109

#### Optical data

Fixture luminous flux (lm)	2200
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80

## IP20 LED Batten LED IP20 BATTEN L1500 SINGLE 4000K 0045160

Photobiological Risk Group	RG0
----------------------------	-----

### Electrical data

Total power consumption (W)	18
Mains voltage (V)	220-240V~
Electrical protection	Class I
Drive current (mA)	120
Nominal Frequency (Hz)	50/60Hz

### Lifetime data

Lumen maintenance - L70 B50	25000
-----------------------------	-------

### Physical data

IP rating	IP20
IK rating	IK02
Nominal Product Length (mm)	1500
Nominal Product Width (mm)	42.5
Nominal Product Height (mm)	47.5
Weight (kg)	0.6

### Packaging


Single packaging type	Mix blister(20% carton, 80% pl)
Product EAN number	5410288451602
Packaging single length / height (cm)	151.0
Packaging single width (cm)	4.5
Packaging single depth (cm)	4.2
DUN14 (outer)	15410288451609
Units per outer package	20
Packaging outer length / height (cm)	152.5
Packaging outer width (cm)	29.0
Packaging outer depth (cm)	21.5

## PHOTOMETRY

Distance [m]	Cone diameter [m]	E <sub>0</sub> <sup>(°)</sup> E <sub>1</sub> (C0) E <sub>2</sub> (C0)	2012 41
0.5	2.73	99.9°	503 10
1.0	5.47	99.9°	224 5
1.5	8.20	99.9°	126 3
2.0	10.93	99.9°	80 2
2.5	13.66	99.9°	56 1
3.0	16.40	99.9°	


Distance [m]      Cone diameter [m]      Illuminance [lx]

— C0 - C180 (Half beam angle: 138.9°)

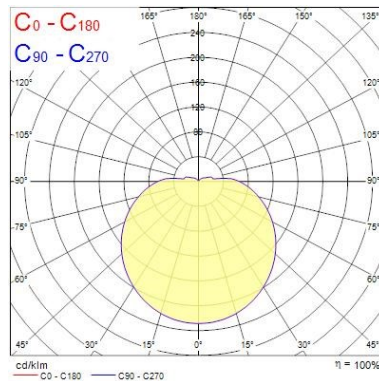



## IP20 LED Batten LED IP20 BATTEN L 1500 SINGLE 4000K 0045160

### TECHNICAL DRAWINGS




**SYLVANIA** 0045160

 This luminaire contains built in LED lamps.

 } **LED**

The lamps cannot be changed in the luminaire.

874/2012 

## IP20 LED Batten

LED IP20 BATTEN L 1500 SINGLE 4000K

0045160

This luminaire contains built in LED lamps.

The lamps cannot be changed in the luminaire.

**SYLVANIA** 0045160 874/2012

A++  
A+  
A  
~~B~~  
~~C~~  
~~D~~  
~~E~~

LED