



100mm (4") Mounts onto a wall or ceiling


SUITABLE FOR



BATHROOM



TOILET



REPLACING FANS

COMPLIES WITH


ErP Directive		
Building Regulations		



- Provides effective ventilation
- Quiet in operation
- Ideal for long duct runs upto 6m

For technical information visit:
www.domusventilation.co.uk

Dimensions

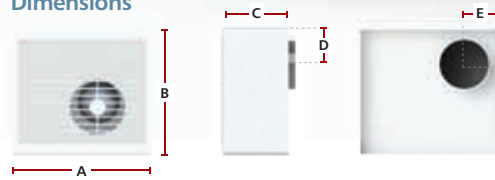

Measured in mm
A: 216 B: 195 C: 98 D: 80/100 E: 32/57 F: 50

Need to source Data Sheet

Code	Timer	Pull Cord	Humidistat	PIR	SELV (12V)	Back-draught shutter	Extract Volume (l/s)	Extract Volume (m³/h)	Max Pressure (Pa)	Weight (kg)
CUR7001B							19	67	117	1.1
CUR7002B							19	67	117	1.1
CUR7003B							19	67	117	1.1
CUR7004B							19	67	117	1.1
CUR7005B							19	67	117	1.1
CUR9003LV							21	75	53	2.0*
CUR9004LV							21	75	53	2.0*

Code	Accessories
CURFD	Fire Damper Back Plate

*Weight includes transformer.

Fans Intro
 Axial Fans
 In-Line Fans
 Centrifugal Fans
 Fan Controls