

RI20+ - ROTARY ISOLATORS

Description:


Deligo 415V Rotary Isolators. They are designed to give your customers all you need in safety, adaptability and value.

Additional Notes:

This product comes in seven sizes, they are all listed below.

Packaging:

Boxed.

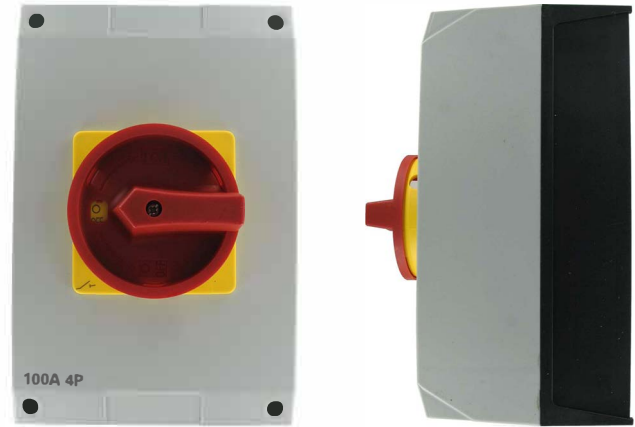

OTHER ADDITIONAL INFORMATION


Features & Benefits

- IP65
- Padlockable Handle
- ABS Material (Moulded) - Flame Retardant.
- Easy Access & Switch Removal
- Deep working space
- BS EN60947 Compliant
- Variable Knockouts on 32 Amp and above

TECHNICAL SPECIFICATIONS

Code	IEC / EN / VDE					
	Category No. AC-21a Switching of resistance loads		Category No. AC-23a Switching of motor loads		Category No. AC-3a Start & shutdown during run	
	220-240V	380-440V	220-240V	380-440V	220-240V	380-440V
RI20	20A	20A	3kW	5.5Kw	2Kw	3Kw
RIL20	20A	20A	3kW	5.5Kw	2Kw	3Kw
RI32	32A	32A	5.5kW	7.5Kw	4Kw	7.5Kw
RI63	63A	63A	11Kw	22Kw	11Kw	12.5Kw
RI100	100A	100A	22Kw	37Kw	18.5Kw	30Kw

ROTARY ISOLATOR SIZING INFORMATION

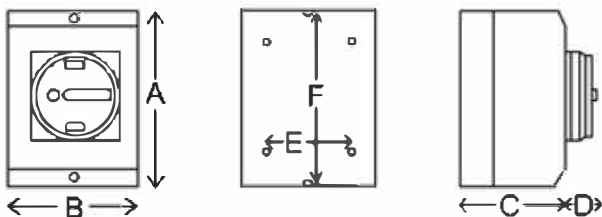

Ampege	Size mm					
	A	B	C	D	E	F
20	100	80	65	35	60	90
20 (RIL)	125	100	85	35	60	115
25	125	100	85	35	60	115
32	125	100	85	35	60	115
40	175	114	100	35	60	165
63	175	114	100	35	60	165
100	240	160	120	45	142	193