



LED ULTRA SLIM LINK LIGHT FITTINGS

LIBRA RANGE

- + Supplied with 2M power lead, 500mm link lead, butt connector & mounting brackets
- + Flicker free quick start
- + Link leads available separately
- codes UC250LLN / UC500LLN/ UC1000LLN
- + 3 year guarantee




For Non-user replaceable light sources:
'The light source contained in this luminaire shall only be replaced by the manufacturer or their service agent or a similar qualified person'.



Cool White	UCLED3CW	UCLED5CW	UCLED8CW	UCLED14CW	UCLED16CW
Description	3W Cool White Link Light	5W Cool White Link Light	8W Cool White Link Light	14W Cool White Link Light	16W Cool White Link Light
Colour Temp	4,000K				
LED Power	3W	5W	8W	14W	16W
Power Rating	230V AC ~ 50Hz				
Barcode	5012739 645617	5012739 645631	5012739 645655	5012739 645679	5012739 645693
Lumen Output	300 / 108 lm/W	500 / 108 lm/W	800 / 108 lm/W	1400 / 108 lm/W	1600 / 108 lm/W
IP Rating	IP20				
Operating Temperature	-10°C to +40°C				
Class	II				
LED Light Source	NDLS (Non-direction light source)				
CRI	>80				
Switching Cycle	20,000				
Life Expectance of fitting	30,000 hours				
Product Dimensions	L222 x W23 X H37mm	L296 x W23 X H37mm	L525 x W23 X H37mm	L857 x W23 X H37mm	L1157 x W23 X H37mm
Product Weight	0.13g	0.23g	0.50g	0.61g	0.70g
Guarantee	3 Years				
Conforms To	EN 60598-1 / EN60598-2-1				

This product contains a light source of energy efficiency Class F.
These fittings are not Dimmable

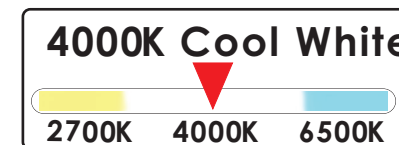



LED ULTRA SLIM LINK LIGHT FITTINGS

LIBRA RANGE

- + Supplied with 2M power lead, 500mm link lead, butt connector & mounting brackets
- + Flicker free quick start
- + Link leads available separately
- codes UC250LLN/ UC500LLN / UC1000LLN
- + 3 year guarantee



For Non-user replaceable light sources: 'The light source contained in this luminaire shall only be replaced by the manufacturer or their service agent or a similar qualified person'.



Warm White	UCLED3WW	UCLED5WW	UCLED8WW	UCLED14WW	UCLED16WW
Description	3W Warm White Link Light	5W Warm White Link Light	8W Warm White Link Light	14W Warm White Link Light	16W Warm White Link Light
Colour Temp	3,000K				
LED Power	3W	5W	8W	14W	16W
Power Rating	230V AC ~ 50Hz				
Barcode	5012739 645624	5012739 645648	5012739 645662	5012739 645686	5012739 645709
Lumen Output	300 / 108 lm/W	500 / 108 lm/W	800 / 108 lm/W	1400 / 108 lm/W	1600 / 108 lm/W
IP Rating	IP20				
Operating Temperature	-10°C to +40°C				
Class	II				
LED Light Source	NDLS (Non-direction light source)				
CRI	>80				
Switching Cycle	20,000				
Life Expectance of fitting	30,000 hours				
Product Dimensions	L222 x W23 X H37mm	L296 x W23 X H37mm	L525 x W23 X H37mm	L857 x W23 X H37mm	L1157 x W23 X H37mm
Product Weight	0.13g	0.23g	0.50g	0.61g	0.70g
Guarantee	3 Years				
Conforms To	EN 60598-1 / EN60598-2-1				

This product contains a light source of energy efficiency Class F.
These fittings are not Dimmable

