

▶ IP55 Screw-On Medium Cover



Standard of Compliance - EN 50102, IEC 695-2-1, IEC 670, CEI23-48
 Specification - • High performing material • IP55
 • Self-extinguishing to V1 UL94 • Glow-wire tested 650°C
 • Mechanical resistance IK08 • Material stability -25°C to 90°C
 • RAL - 7035

List No.	Size (LxWxD)	Fairleads	Pack Qty
93230	150 x 110 x 100mm	Plain sides	1
93260	150 x 150 x 100mm	Plain sides	1
93240	220 x 150 x 100mm	Plain sides	1
93250	300 x 220 x 100mm	Plain sides	1

▶ IP56 Screw-On Low Cover Plain Sided



ECONOMY MOULDED

Standard of Compliance - EN 50102, IEC 695-2-1, IEC 670, CEI23-48
 Specification - • High performing material • IP55
 • Self-extinguishing to V1 UL94 • Glow-wire tested 960°C
 • Mechanical resistance IK08 • Material stability -25°C to 90°C
 • RAL - 7035

List No.	Size (LxWxD)	Pack Qty
E94204	100 x 100 x 60mm	1
E95206	150 x 110 x 70mm	1
E96207	190 x 140 x 70mm	1
E97208	240 x 190 x 90mm	1
E98209	300 x 220 x 120mm	1
E99210	380 x 300 x 120mm	1


▶ IP55 Screw-On High Cover



Standard of Compliance - EN 50102, IEC 695-2-1, IEC 670, CEI23-48
 Specification - • High performing material • IP55
 • Self-extinguishing to V1 UL94 • Glow-wire tested 960°C
 • Mechanical resistance IK08 • Material stability -25°C to 90°C
 • RAL - 7035

List No.	Size (LxWxD)	Fairleads	Pack Qty
93221	110 x 110 x 112mm	Plain sides	1
93231	150 x 110 x 150mm	Plain sides	1
93261	150 x 150 x 150mm	Plain sides	1
93241	220 x 150 x 150mm	Plain sides	1
93251	300 x 220 x 150mm	Plain sides	1

▶ IP68 Insulating & Sealing Gel

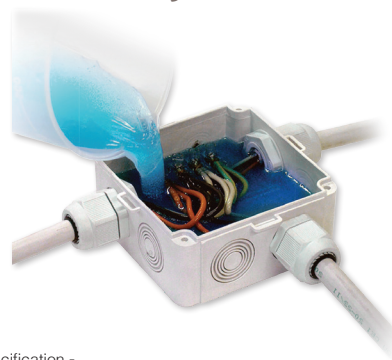

Specification -
 • Offers IP68 protection • Re-enterable & reusable
 • No shelf life limitation • Removable • Dielectric strength > 22Kv
 • Installations up to 1Kv & 140°C • Non-toxic

Note - Connection box, wires & glands not included

List No.	Description	Pack Qty
BG170	170ml mix-sachet	1
BG250	250ml mix-sachet	1
BG400	400ml mix-sachet	1

▶ 20mm IP68 Domed Top Compression Glands (6-12mm)

Complete with locknuts



Standard of Compliance - BS EN60529:1992 + A2:2013
 BS EN 62444
 Specification - • IP68 @10M (2Bar) • Nylon 6.6 • -30°C to +80°C
 • Available in black, white, red or grey

List No.	Male Thread Size	Cable Range	Pack Qty
DTG2012W	20mm	6-12mm	10
DTG2012G	20mm	6-12mm	10
DTG2012B	20mm	6-12mm	10
DTG2012R	20mm	6-12mm	10

▶ 20mm IP68 Domed Top Compression Glands (10-14mm)

List No.	Male Thread Size	Cable Range	Pack Qty
DTG2014W	20mm	10-14mm	10
DTG2014G	20mm	10-14mm	10
DTG2014B	20mm	10-14mm	10
DTG2014R	20mm	10-14mm	10

▶ 25mm IP68 Domed Top Compression Glands (13-18mm)

List No.	Male Thread Size	Cable Range	Pack Qty
DTG2518W	25mm	13-18mm	10
DTG2518G	25mm	13-18mm	10
DTG2518B	25mm	13-18mm	10
DTG2518R	25mm	13-18mm	10

