


EdgeLiteTM PRO

LED Edge-Lit Flat Panels

Over 60% energy savings compared to traditional fluorescent
 Edge-lit panel for complete uniformity across diffuser
 High quality light guide designed to prevent yellowing
 SDCM <4 providing consistent light colour quality
 Delivering 130lm/W
 UGR19
 EN-LPP6060 & EN-LPP1230 - IP44 rated from the front
 IK06 rated
 Suitable for installation in 15 & 24mm T-bar ceilings

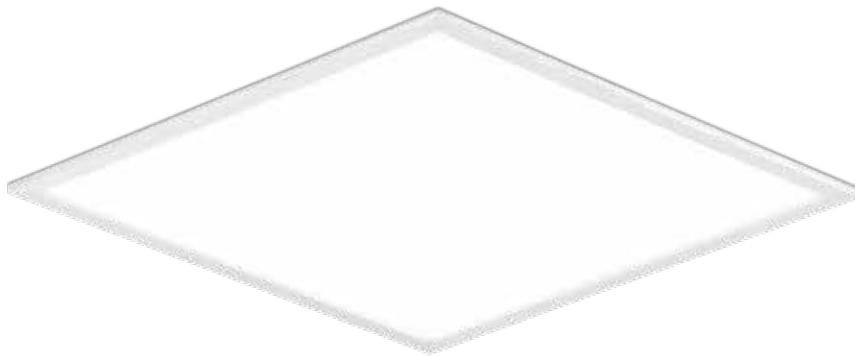

Cat. No.	Type	Watts	Colour	Lumens	lm/W	Beam
600 x 600mm						
EN-LPP6060*/40 [†]	Non-Dim	26W	4000K	3380lm	130	110°
EN-LPP6060*/50 [†]	Non-Dim	26W	5000K	3380lm	130	110°
1200 x 600mm						
EN-LPP1260*/40 [†]	Non-Dim	40W	4000K	5200lm	130	110°
EN-LPP1260*/50 [†]	Non-Dim	40W	5000K	5200lm	130	110°
1200 x 300mm						
EN-LPP1230*/40 [†]	Non-Dim	26W	4000K	3380lm	130	110°
EN-LPP1230*/50 [†]	Non-Dim	26W	5000K	3380lm	130	110°

Accessories

EN-LPEM2 3 Hour Emergency Pack for Panel Range

*Add suffix **DA** for DALI or **V** for 1-10V dimmable options
Surface Mount box, **Adjustable Suspension** kit & **Ceiling Recess Mounts** available.
[†]For DALI Emergency - the EM side will not report back



make smart with



For Information about AOne ZIGBEE
 Visit auroralighting.com

5 Year Warranty

L70 50,000hrs

1-10V & DALI dimmable options

Emergency option

White finish

make smart with



For Information about AOne ZIGBEE
 Visit auroralighting.com

works with

.control




1-10V Inline Dimmer
 for 1-10V Option




On/Off Relay



EN-LPP6060



EN-LPP1260



EN-LPP1230



EN-LPP6060

(L) 595mm Length
 (W) 595mm Width
 (H) 10mm Height

EN-LPP1260

(L) 1195mm Length
 (W) 595mm Width
 (H) 10mm Height

EN-LPP1230

(L) 1195mm Length
 (W) 295mm Width
 (H) 10mm Height